



# INSTALLATION INSTRUCTIONS

Accessory  
**20" ALUMINUM WHEEL**  
P/N 08W20-SZN-200

Application  
**2012 ZDX**


Publications No.  
**BII 46574**  
Issue Date  
**AUG 2011**

## PARTS LIST


Aluminum wheel  
(The illustration may differ from the actual wheel.)



Wheel center cap  
(The illustration may differ from the actual center cap.)



Center cap emblem




2 Push nuts




Tire pressure information label



Wheel cleaning information  
(Give this information to your client.)




Accessory User's Information Manual



## Parts for TPMS sensor assembly


Tire pressure sensor assembly

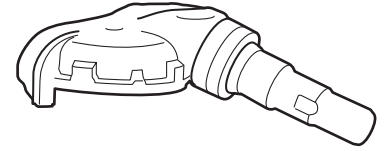

Washer



Valve nut



## TOOLS AND SUPPLIES REQUIRED

- Ratchet
- 11 mm Socket
- Torque wrench
- Isopropyl alcohol
- Shop towel
- Hair dryer

## SPECIFICATIONS

Rim size	20 x 9 J (inset 45)	
Tire size	275/40R20 106W	
Bolt hole PCD	120 (5 holes)	
Tire pressure	Front	220 kPa (2.2 kgf/cm <sup>2</sup> , 32 psi)
	Rear	220 kPa (2.2 kgf/cm <sup>2</sup> , 32 psi)


## INSTALLATION

**Client Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

### NOTE:


- This aluminum wheel is designed for use on a vehicle equipped with a TPMS (Tire Pressure Monitoring System).
- This aluminum wheel is equipped with a TPMS sensor. See the service manual for the tire replacement and TPMS sensor installation procedures.
- Install the correct size tire.
- Use a tire changer to install and remove the tire. Do not use a tire lever, as it may cause damage to the tire and aluminum wheel.
- Do not damage the wheel center cap when installing the emblem.
- This center cap emblem should be installed only if the ambient air temperature is 15°C (60°F) or above. Heat the center cap emblem and bonding surfaces with a hair dryer set on LOW if the ambient air temperature is below 15°C (60°F).
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Please advise the client.

1. Using isopropyl alcohol on a shop towel, thoroughly clean the area where the center cap emblem will attach.

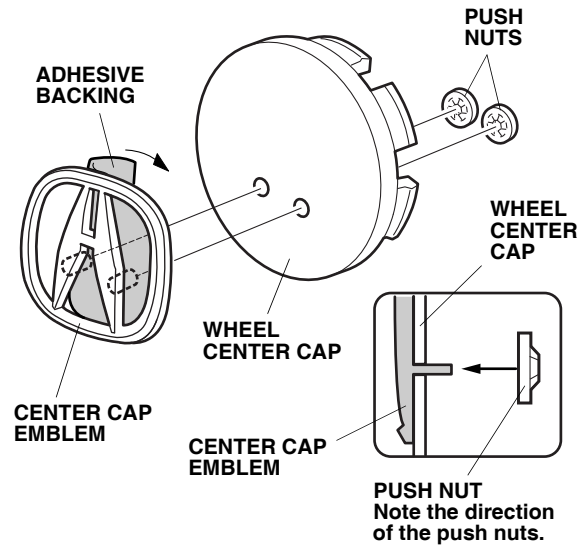

2. Remove the adhesive backing from the center cap emblem.
3. Attach the center cap emblem to the wheel center cap by aligning the two pins with the two holes in the wheel center cap. Hold the emblem firmly against the wheel center cap with the palm of your hand for 30 seconds.
4. Secure the center cap emblem with two push nuts. Note the direction of the push nuts.

- Before installing the tire pressure sensor assembly, use isopropyl alcohol on a shop towel to thoroughly clean the mating surface on the sensor and the aluminum wheel.

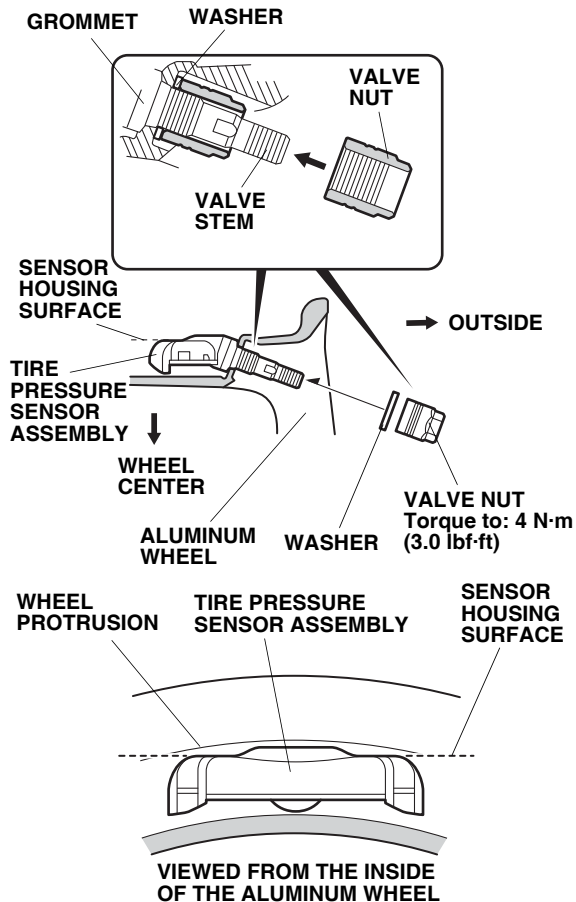


- Install the tire pressure sensor assembly and the washer onto the aluminum wheel, and finger tighten the valve nut. Make sure the pressure sensor is resting on the wheel.
- Tighten the valve nut to the specified torque while holding the tire pressure sensor assembly against the wheel.  
Torque the valve nut to: 4 N·m (3.0 lbf-ft)

**NOTE:**

- Install the tire pressure sensor assembly so that the sensor housing surface does not protrude into the bead area of the wheel.
- Do not reuse grommets that have been tightened, even one time, to the specified torque. They may cause a leak.
- Do not use pneumatic or electric tools on the valve nut.
- Tightening the nut above the specified torque may damage the grommet.

- Install the tires according to the vehicle service manual.
- Install the wheels on the vehicle and torque the mounting bolts to 127 N·m (94 lbf-ft).
- Open the left front door. Using isopropyl alcohol on a shop towel, thoroughly clean the area where the Tire Pressure Information Label will attach. Remove the adhesive backing from the label, and attach it over the standard tire information label as shown. To prevent confusion, attach the accessory tire pressure information label directly over the standard tire information label.

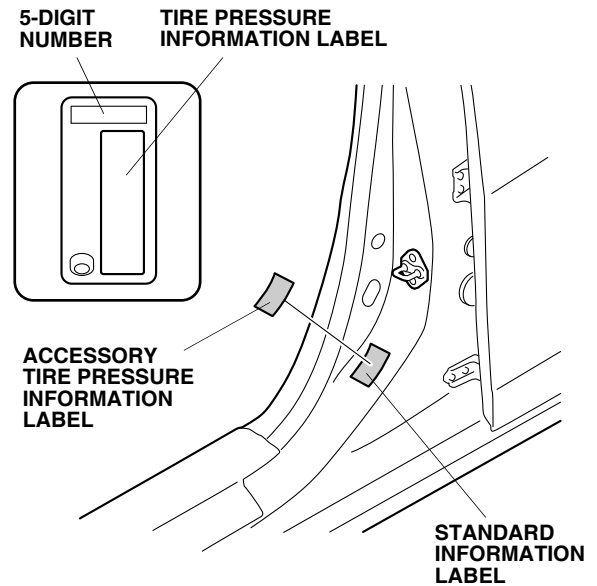

- Insert the "Supplemental Information" included in the kit into the vehicle owner's manual. To attach the page, refer to "Important Information to Dealer:" included in the Accessory User's Information Manual.

**USE AND CARE**

- Use a neutral detergent to clean the wheels.
- Rinse off the neutral detergent promptly.