



ACURA INSTALLATION INSTRUCTIONS

Accessory

CARGO NET
P/N 08L96-SJA-200

Application

2006 RL

Publications No.


BII 31134

Issue Date

OCT 2005

PARTS LIST

Cargo net



4 Hooks



2 Anchors




2 Nuts



4 Washers



2 Flange bolts



2 Spring washers



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Flat-tip screwdriver

Clip remover

10 mm Combination wrench

10 mm Offset wrench


Metal scale

INSTALLATION

NOTE: Be careful not to damage the body.


1. Open the trunk lid. Remove the trunk floor from the trunk floor.

TRUNK LID

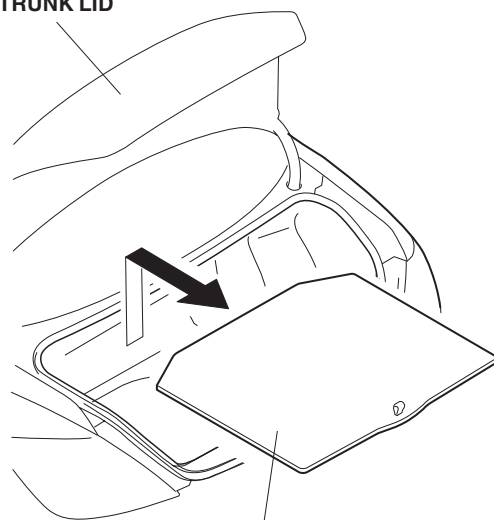


TRUNK FLOOR

2. Remove the weatherstrip, and remove the rear trim panel (two retaining tabs and four clips).

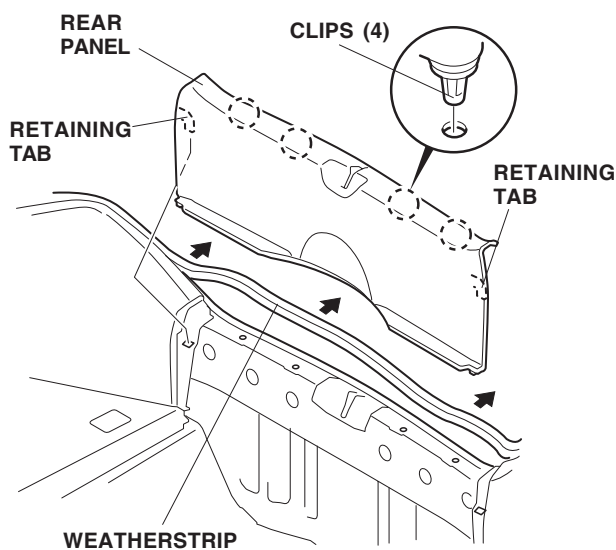


3. Remove the two tie down hooks from the bottom of the right trunk side trim panel (open the cover, and remove the screw for each trunk hook). Insert a metal scale (pocket ruler) at the edge of the cover, and pry it open. Take care not to damage the cover.

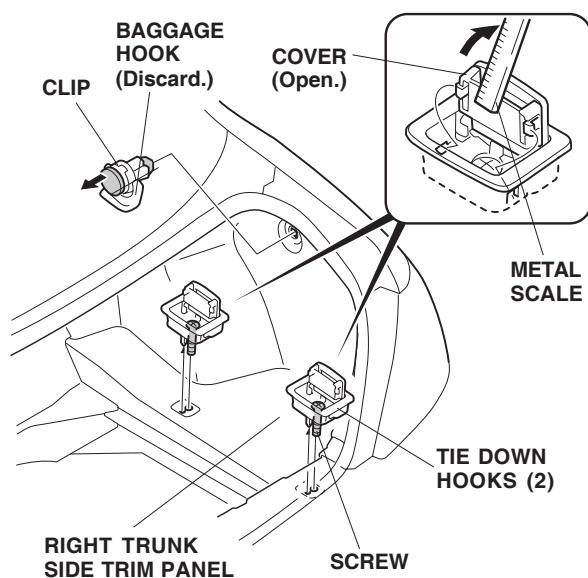


4. Remove the trunk hook (clip) from the right trunk side trim panel.

5. Remove the clip from the trunk trim panel.

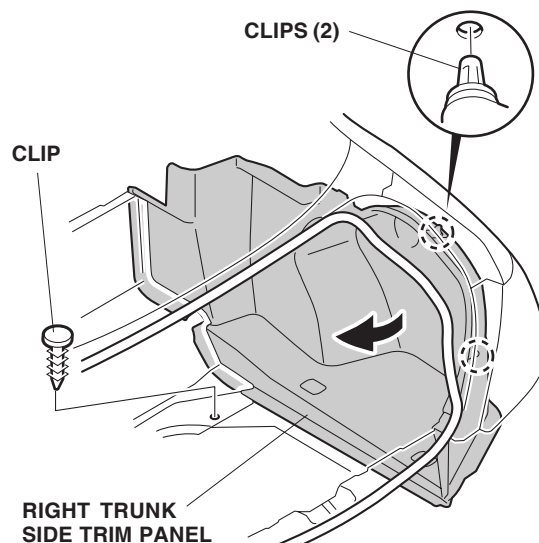


6. Pull out the right trunk side trim panel (two clips).

7. Install the nut, two washers, spring washer, and flange bolt into the hole in the right rear inside panel where you removed the trunk hook.

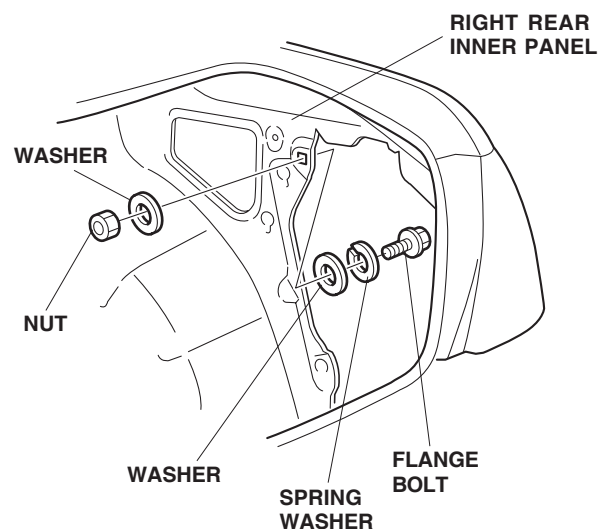


8. Reinstall all removed parts. Check that all clips are installed securely.

9. Install the anchor to the flange bolt.

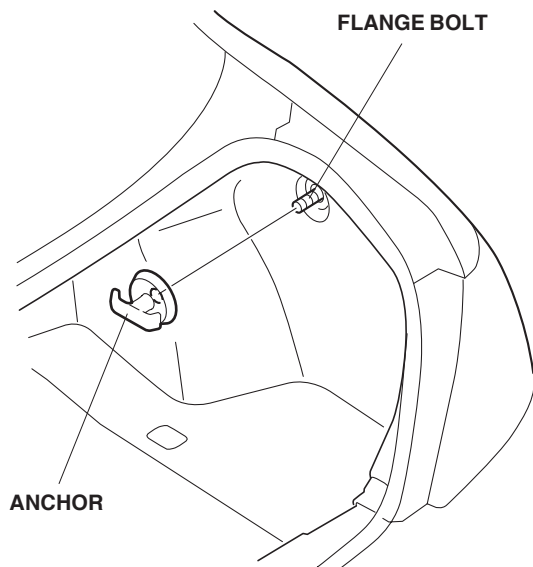


10. Repeat steps 3 through 9 on the left side of the vehicle.

11. Attach the four hooks onto the cargo net as shown.

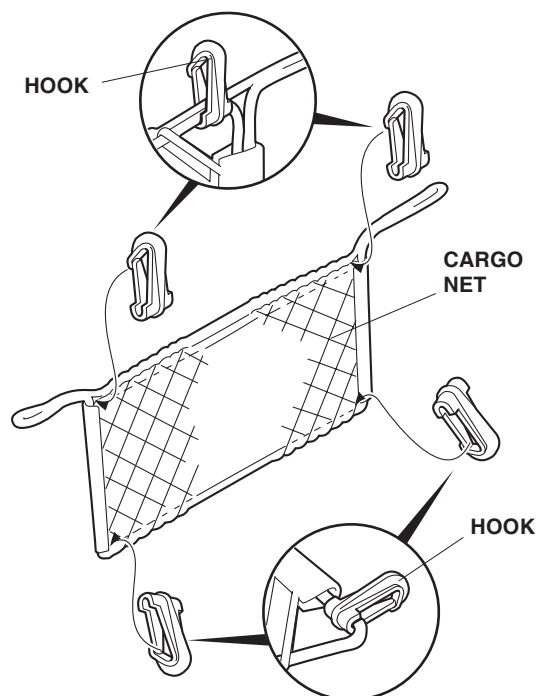

12. Install the cargo net to the tie down hooks and the anchors in the trunk. The cargo net can be installed in 2 different positions, vertically or horizontally.

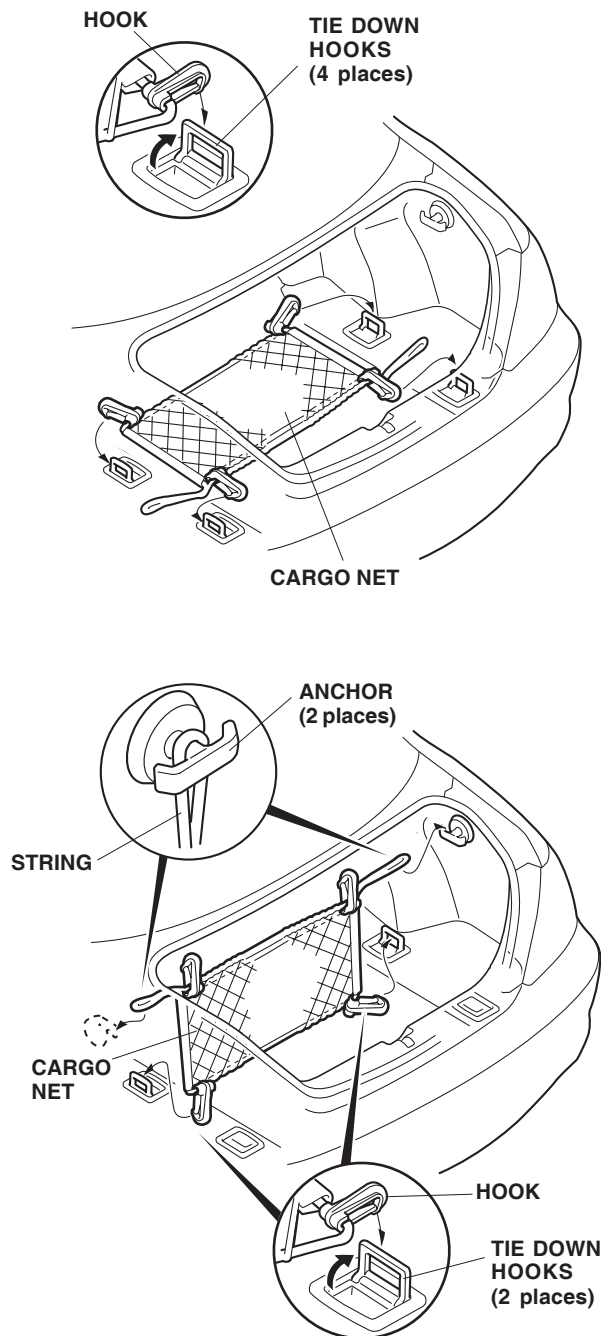

NOTE:

- Do not store large or fragile objects in the net.
- Do not store objects with sharp edges or corners, as they may damage the cargo net or the car. Wrap such objects in paper or a blanket so they will not contact the net directly.