



INSTALLATION INSTRUCTIONS

Accessory

DOOR EDGE GUARDS

Application

2007 MDX

Publications No.


BII 32739-33978

Issue Date


OCT 2006

PARTS LIST

Right front door edge guard

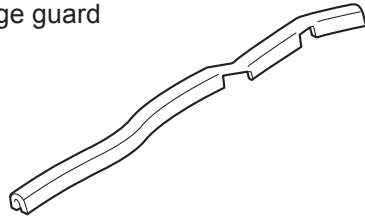

Left front door edge guard

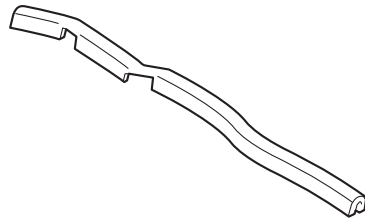


Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool



TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen

Touch-up paint


INSTALLATION

Customer Information: The information in this instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."


NOTE: The door edge guards will not fit on vehicles equipped with body side molding.

1. Clean and wax the area to be covered with a high quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.
3. Position each door edge guard against the inside edge of the front door using the bends for reference. Mark the sealant at the top and bottom ending points of each the door edge guard.

Front Door:

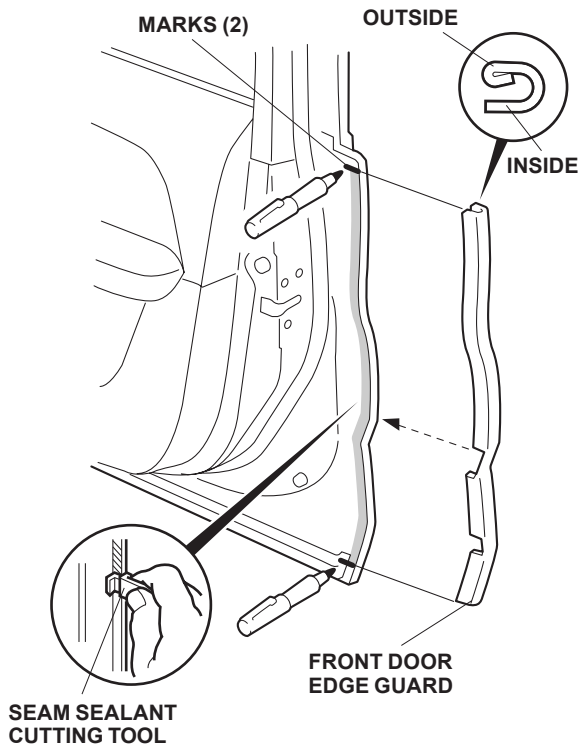

Rear Door:

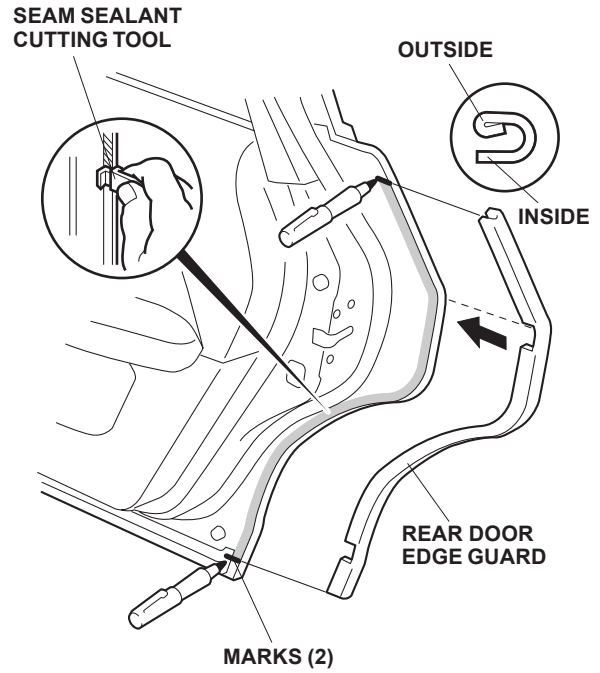


4. Position the cutting edge of the seam sealant cutting tool against the door edge and trim the seam sealant from mark to mark.

NOTE: The cutting tool only cuts in one direction. Move it upward on the right side of the vehicle and downward on the left side.


5. Apply touch-up paint to the door, and let it dry.

- Position the door edge guard on the door edge using the bends for reference. Starting at the feature line tap into position with a series of light taps using a rubber mallet.

NOTE: Be sure to tap the door edge guard into position with a series of light taps. Once in place, do not remove, reposition, or reinstall the door edge guard. It will not hold securely.

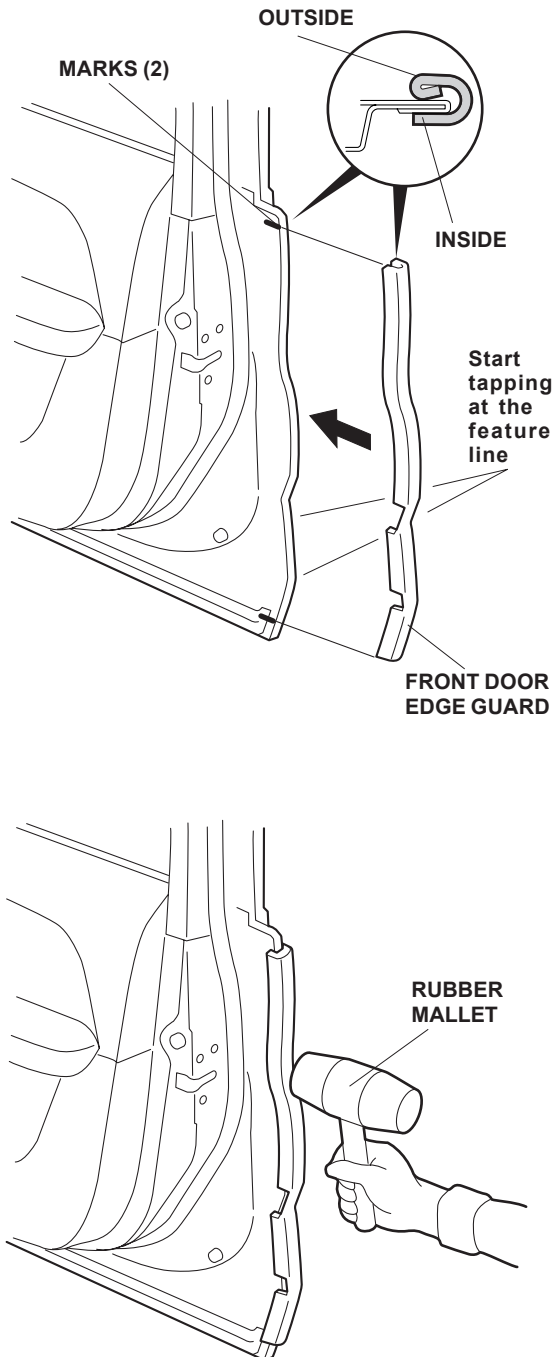

Front Door:

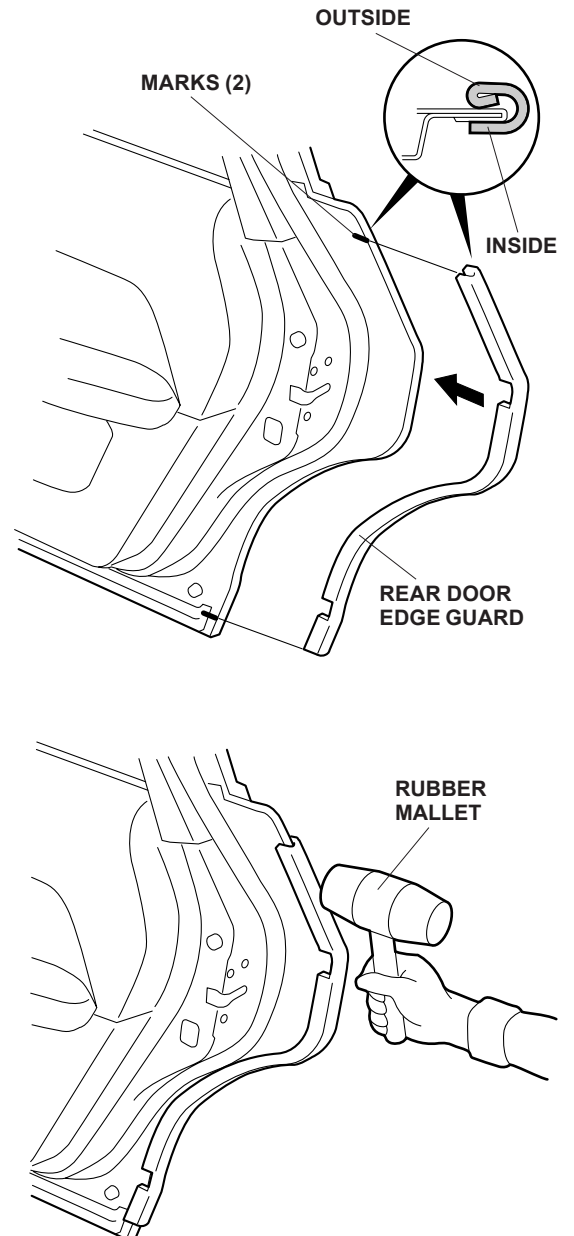

Rear Door:

- Repeat steps 1 through 6 to install the door edge guards on the other side of the vehicle.