



**ACURA**

**INSTALLATION  
INSTRUCTIONS**

Accessory

**BODY SIDE MOLDING**

Application

**2007 RDX**

Publications No.


**BII 32589**

Issue Date


**JULY 2006**

**PARTS LIST**


Left front side protector

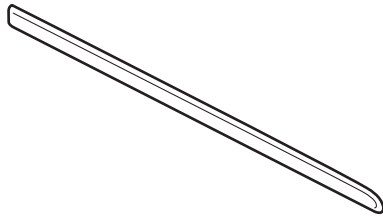


Right front side protector

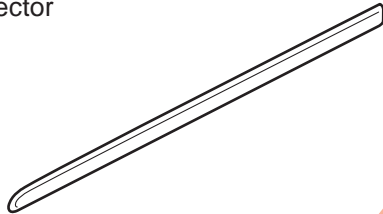


Left rear side protector




Right rear side protector




Front Template

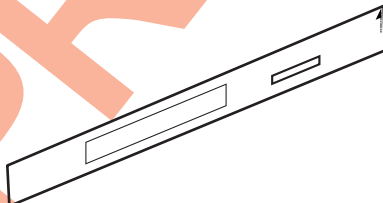

Rear Template



Alcohol swab



**TOOLS AND SUPPLIES REQUIRED**

Shop towel

Masking tape


**INSTALLATION**

**NOTE**


- Before removing parts, note their locations and how they are installed so that they can be reinstalled in their original places properly.
- Be sure that the temperature of the car body where the accessory will be attached is 15°C or above before installation. Warm up the bonding surface when the temperature is low, especially in winter, as the bonding performance can be deteriorated at low temperature.
- Wipe up oil, grease, dirt and other foreign material thoroughly from the installation surface. Take care not to spill the isopropyl alcohol on a part other than the installation surface. Use a clean shop towel dampened with the isopropyl alcohol to clean. Allow the cleaned surface to dry thoroughly before installation.
- Do not allow the bonding surface to get wet, e.g. by washing the car, for approximately 24 hours after attaching the accessory.
- Install the accessory by pressing it firmly with the palms of your hands. Take care not to damage the accessory and the vehicle parts during installation.

## Installing The Front Side Protector


1. Check the surface where the left front side protector will be attached and clean the surface using the alcohol swab.

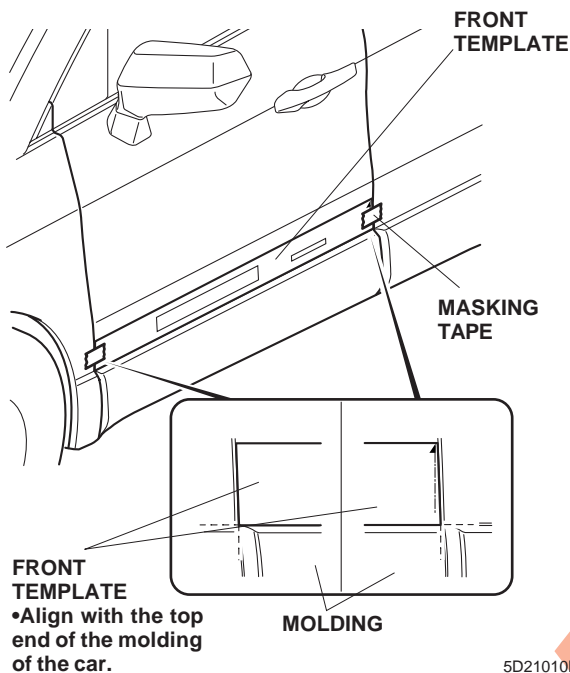

2. Position the front template in the position shown by aligning it with the ends of the left front door and the top end of the molding of the car. Secure the template with the masking tape as shown.
3. Attach a piece of masking tape to an end of each of the three adhesive backings on the inner side of the left front side protector. Peel back the three adhesive backings partway and temporarily attach them to the surface side of the front side protector. Remove another adhesive backing.

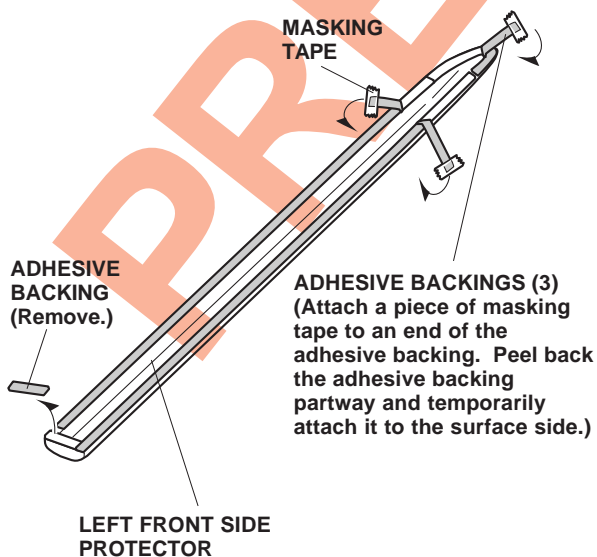


4. Align the end of the left front side protector with the front template as shown and temporarily attach it along the top end of the front template.

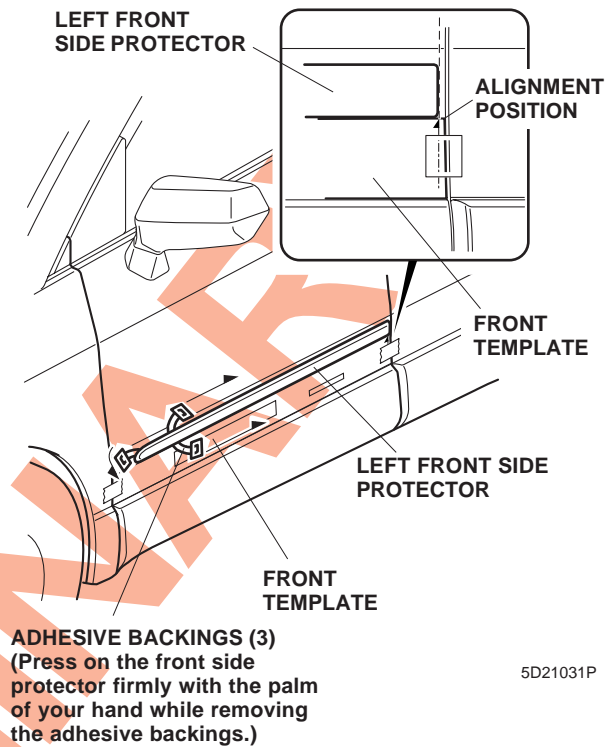


5. Press on the left front side protector firmly with the palm of your hand while removing the adhesive backings that you temporarily attached to the surface side of the front side protector. Remove about 50 to 100 mm at a time pressing on the protector with the palm of your hand.
6. Remove the front template.

## Installing The Rear Side Protector


7. Check the surface where the left rear side protector will be attached and clean the surface using the alcohol swab.

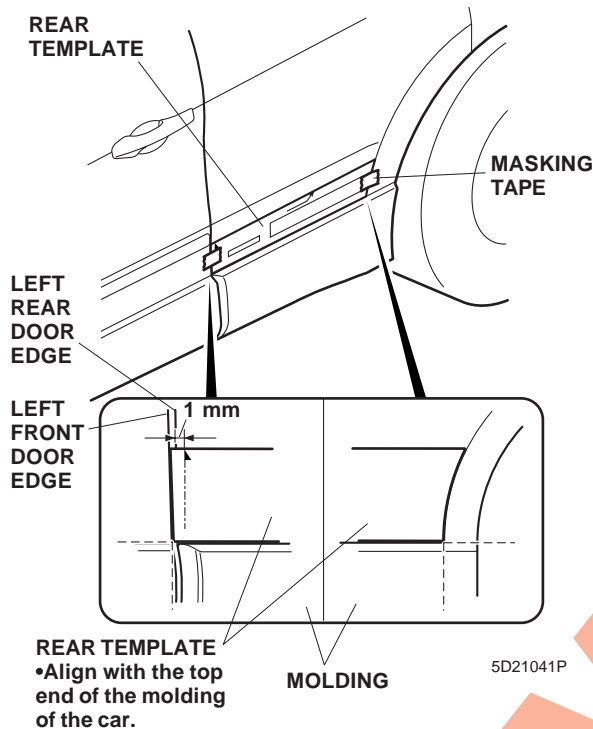

8. Position the rear template in the position shown by aligning it with the end left front door edge and the top end of the molding of the car. Secure the rear template with the masking tape as shown.
9. Attach a piece of masking tape to an end of each of the three adhesive backings on the inner side of the left rear side protector. Peel back the three adhesive backings partway and temporarily attach them to the surface side of the left rear side protector. Remove the other adhesive backings.

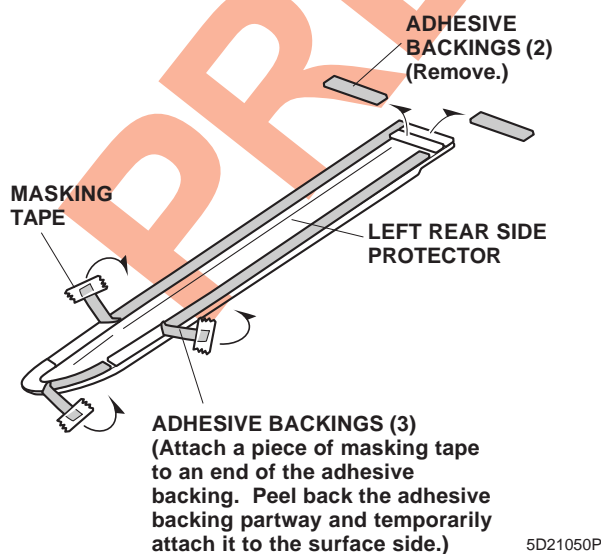

10. Align the end of the left rear side protector with the rear template as shown and temporarily attach it along the top end of the rear template.

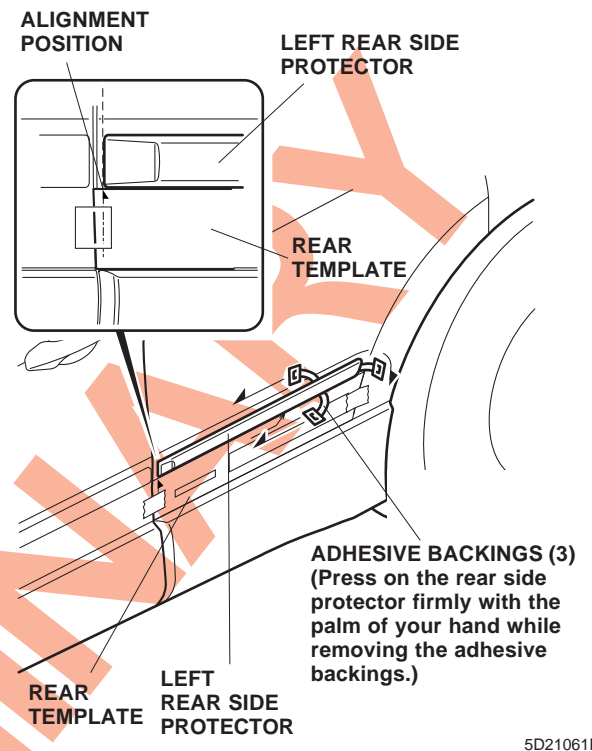

11. Press on the left rear side protector firmly with the palm of your hand while removing the adhesive backings that you temporarily attached to the surface side of the rear side protector. Remove about 50 to 100 mm at a time pressing on the protector with the palm of your hand.
12. Remove the rear template.
13. Repeat the procedures on the right side.