

# **ACURA** **INSTALLATION** **INSTRUCTIONS**

Accessory  
**DOOR EDGE GUARDS**

Application  
**2008 TL**

Publications No.  
**BII 37384**  
 Issue Date  
**JUN 2007**

## PARTS LIST

Right front door edge guard



Left front door edge guard




Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool



## TOOLS AND SUPPLIES REQUIRED

Rubber mallet  
 Felt-tip pen  
 Touch-up paint


## INSTALLATION

**Client Information:** The information in this instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”


**NOTE:** These instructions show the right door edge guard being installed. The same procedure applies to installing the left door edge guard.

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.
3. Using contours for reference, position each door edge guard against the inside edge of the front door. Mark the sealant at the top and bottom end points of each door edge guard.

**Front:**

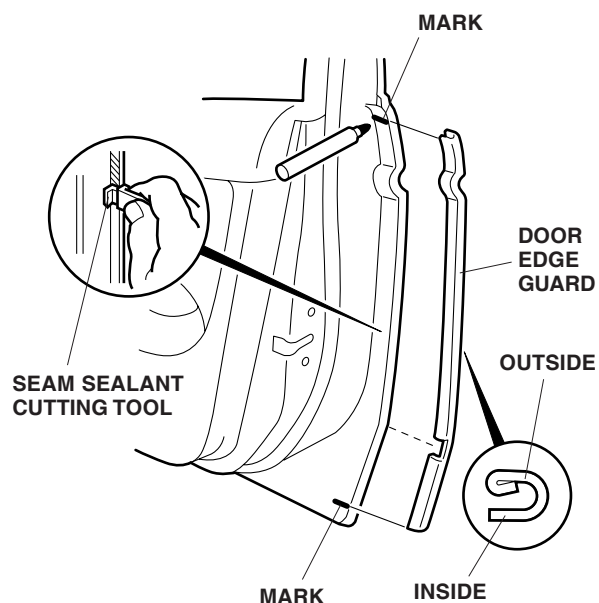

**Rear:**


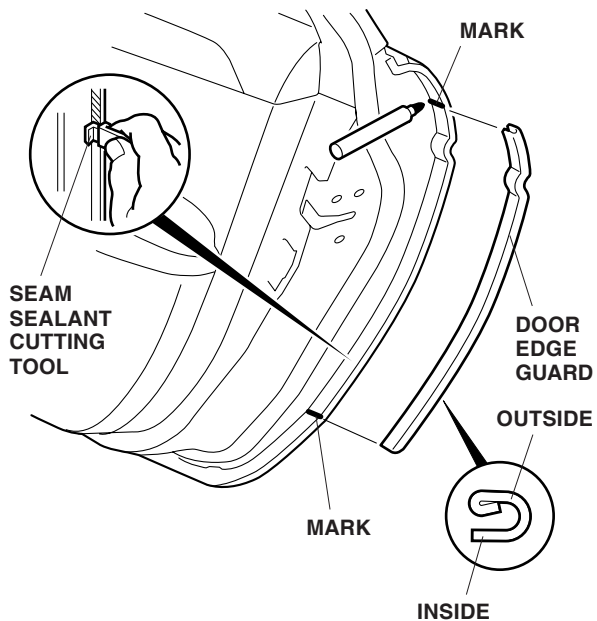


4. Position the cutting edge of the seam sealant cutting tool against the door edge and trim the seam sealant between the marks.



**NOTE:** The cutting tool only cuts in one direction. Move it upward on the left ( driver's) side of the vehicle and downward on the right (passenger's) side.

5. Apply touch-up paint to the trimmed door edge, and let it dry.
6. Position the door edge guard on the door edge, and tap into position with a series of light taps using a rubber mallet. Tap on the door edge guard at the character line area first.

**Front:**

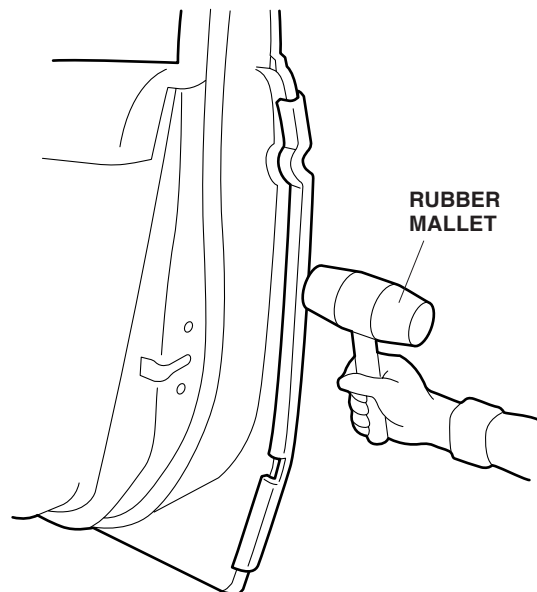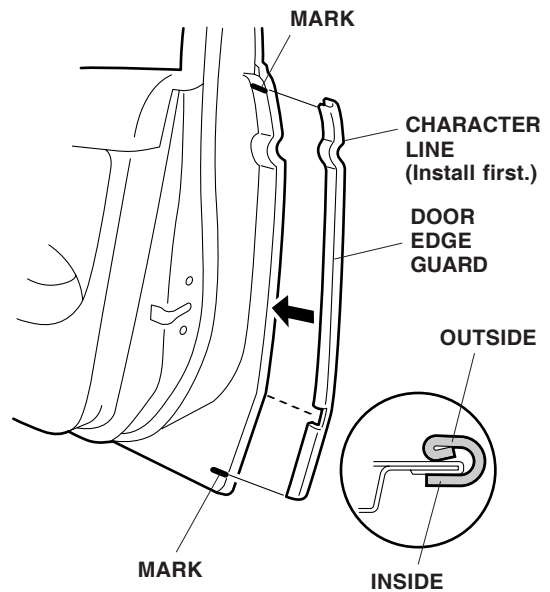

**Rear:**

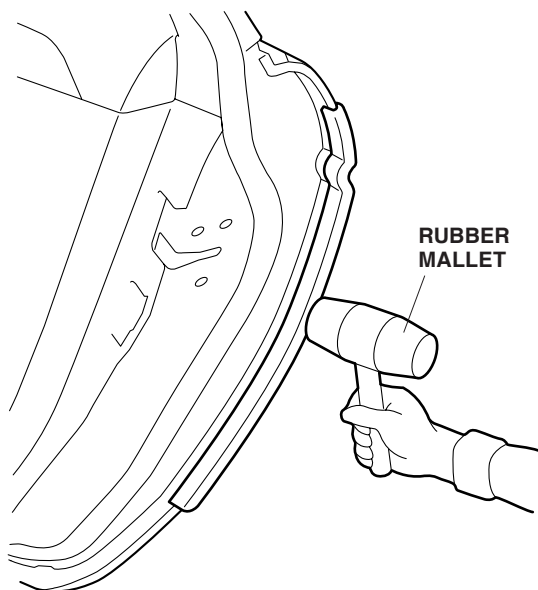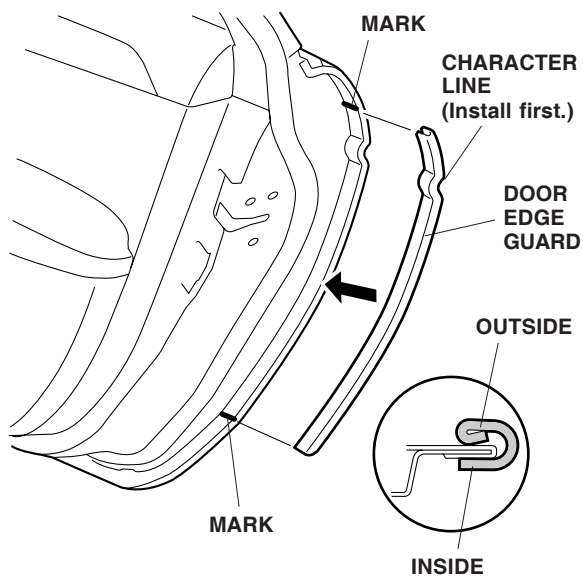

7. Repeat steps 1 through 6 to install the door edge guards on the other side of the vehicle.