



INSTALLATION INSTRUCTIONS


Accessory
SPLASH GUARDS

Application
2009 TL


Publications No.
BII 39516-40571
Issue Date
SEP 2008

PARTS LIST

Left front splash guard



Right front splash guard



Left rear splash guard



Right rear splash guard



Left rear bracket



Right rear bracket




8 Self-tapping screws



2 Clips



2 Rear brackets

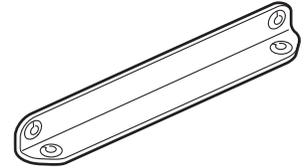

TOOLS AND SUPPLIES REQUIRED

Stubby Phillips screwdriver

90° Phillips screwdriver


INSTALLATION

NOTE:

- Splash guards cannot be installed with side and rear under spoiler.
- These installation instructions show the left splash guards being installed. The same procedure applies to installing the right splash guards.
- Clean and wax the areas to be covered with a high-quality paste wax.


Installing the Front Splash Guards

1. Turn the steering wheel fully counterclockwise.

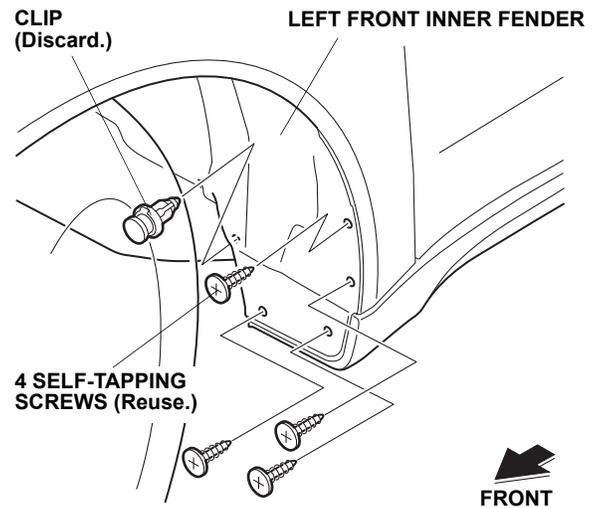

2. Remove the four self-tapping screws and one clip from the left front inner fender.


3. Install the left front splash guard using four self-tapping screws. Do not tighten the self-tapping screws yet.

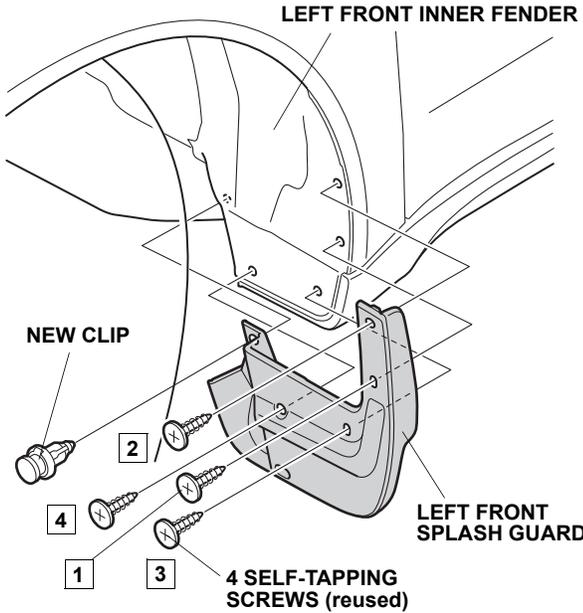


4. While holding the left front splash guard against the left front inner fender, tighten the self-tapping screws in the order shown. Install the new clip.
5. Turn the steering wheel all the way clockwise, and repeat steps 2 thru 4 to install the right front splash guard.

Installing the Rear Splash Guards


6. Remove the three self-tapping screws from the left rear inner fender.

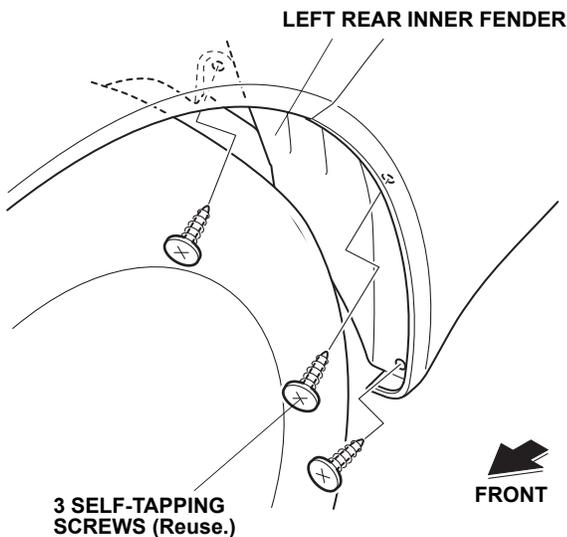

7. Install the left rear bracket on the left rear inner fender with two self-tapping screws.

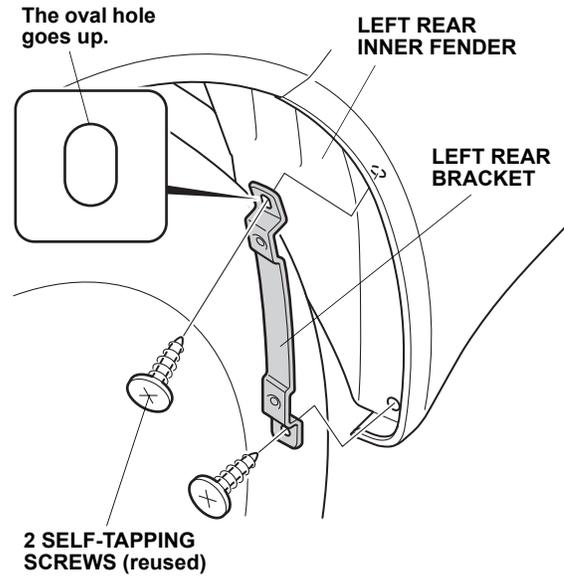


8. Secure the left rear splash guard on the left rear inner fender with two new self-tapping screws and one screw which was reused. Do not tighten the self-tapping screws yet.

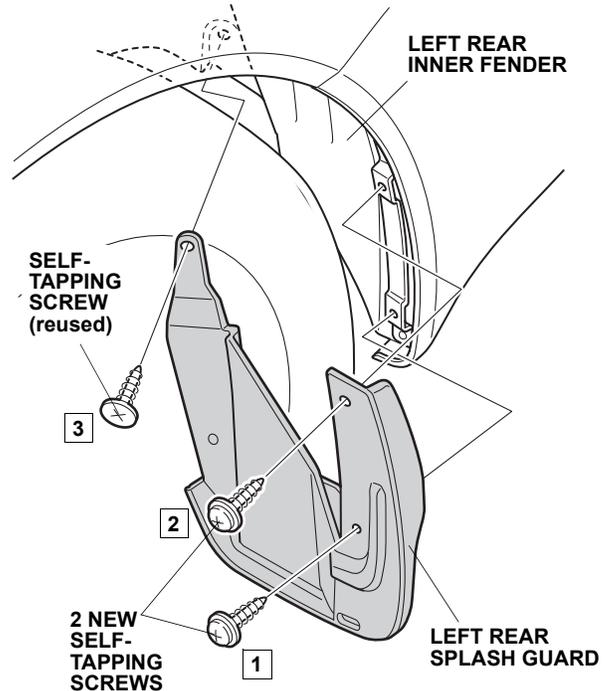

9. While holding the left rear splash guard against the left rear bumper, tighten the self-tapping screws in the order shown.

10. Install the rear bracket to the left rear splash guard and rear bumper with two new self-tapping screws.

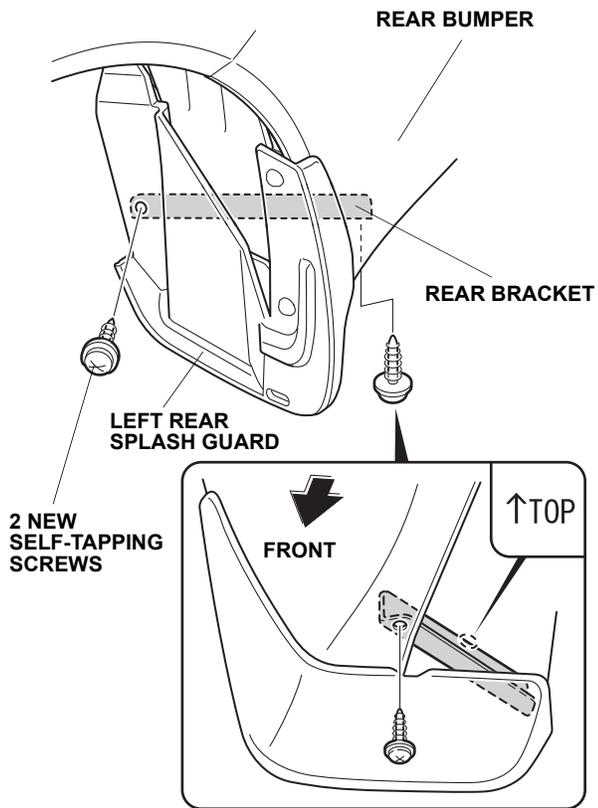

11. Repeat steps 6 thru 10 to install the right rear splash guard.