



# INSTALLATION INSTRUCTIONS

Accessory

DOOR EDGE GUARDS

Application

2009 TSX

Publications No.


BII 39061

Issue Date


APRIL 2008

## PARTS LIST


Right front door edge guard




Left front door edge guard




Right rear door edge guard



Left rear door edge guard



Seam sealant cutting tool




## TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen

Touch-up paint

## Illustration of the Door Edge Guards Installed on the Vehicle

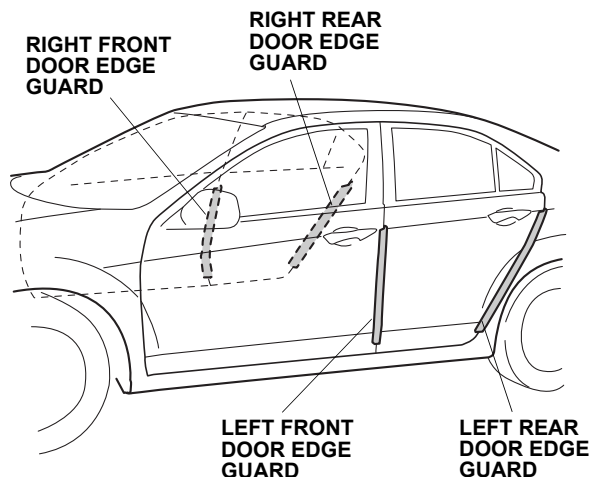

## INSTALLATION


**Client Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

**NOTE:** This installation instruction shows the right door edge guards being installed. The same procedure applies to installing the left door edge guards.


1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

## Installing the Front Door Edge Guards

- Align the bend in the right front door edge guard with the rear edge of the body line as shown.

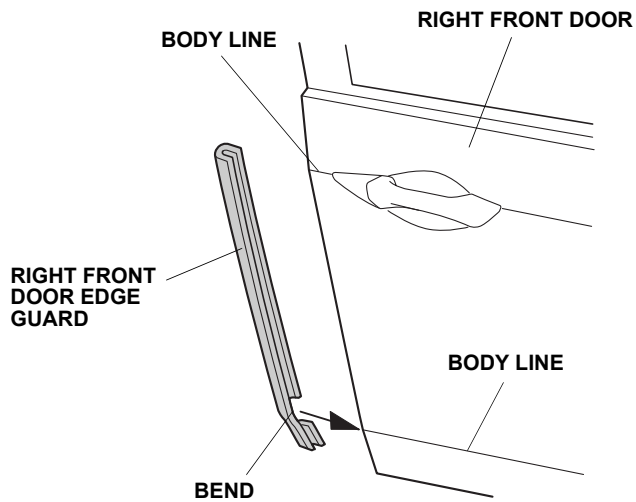

- Using a felt-tip pen, mark the inside edge of the front door at the upper and lower ends of the right front door edge guard.

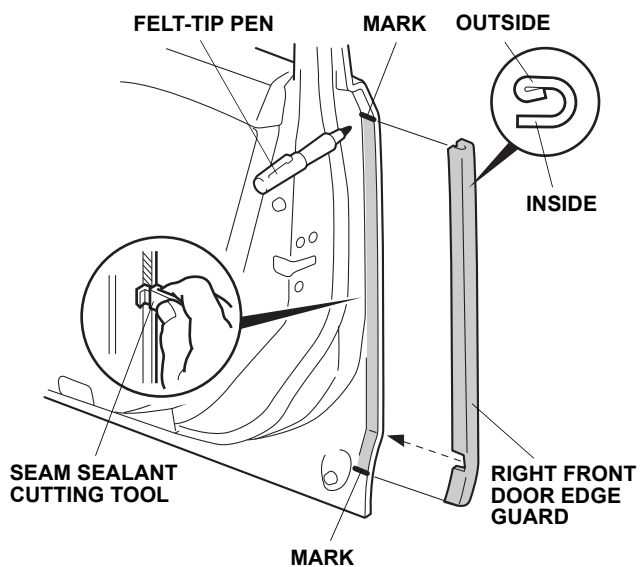


- Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark between the marks at the top and bottom of the door edge.


**NOTE:** The cutting tool only cuts in one direction. Move it upward on the right side of the vehicle and downward on the left side.

- Apply touch-up paint to the door, and let it dry.

- Position the right front door edge guard on the right front door edge.

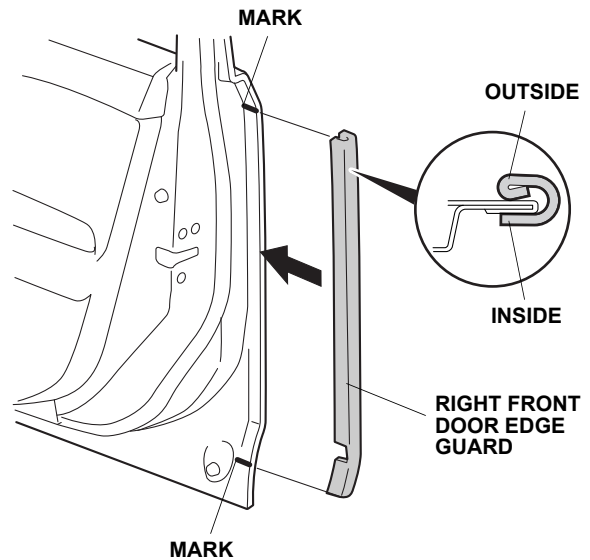


- Using a rubber mallet, lightly tap around the bend in the right front door edge guard.

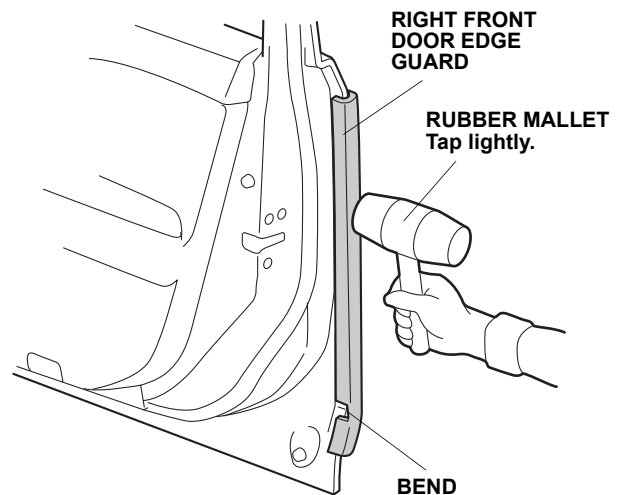


- Lightly tap the rest of the right front door edge guard into position.
- Repeat steps 3 through 9 to install the left front door edge guard.

## Installing the Rear Door Edge Guards

11. Align each bend in the right rear door edge guard with the rear edge of the body lines as shown.

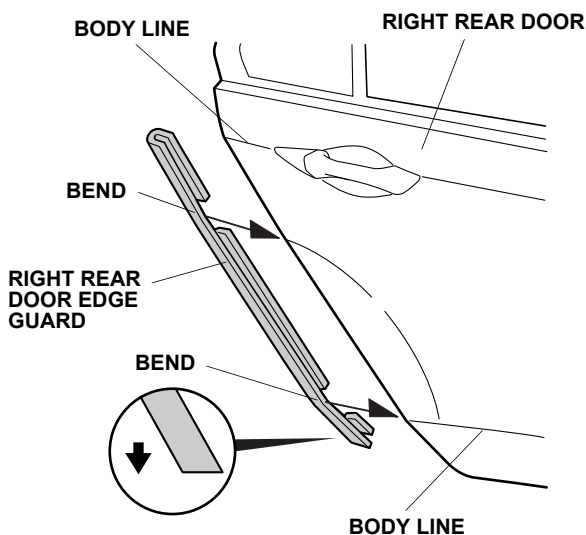

12. Using a felt-tip pen, mark the inside edge of the rear door at the upper and lower ends of the right rear door edge guard.

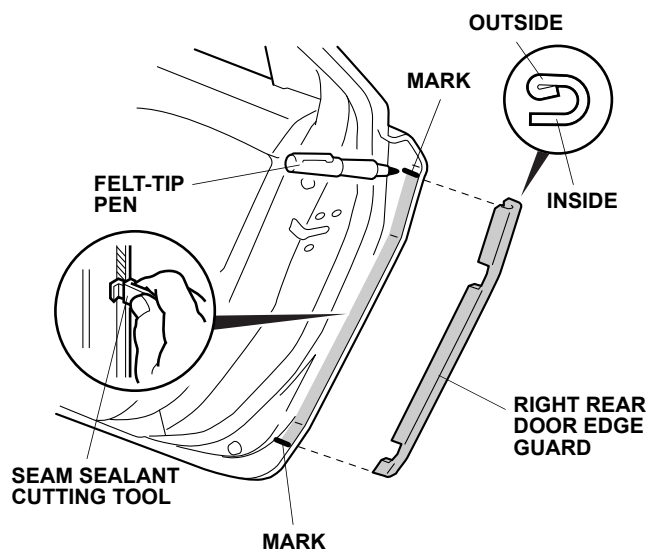


13. Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark between the marks at the top and bottom of the door edge.


NOTE: The cutting tool only cuts in one direction. Move it upward on the right side of the vehicle and downward on the left side.

14. Apply touch-up paint to the door, and let it dry.

15. Position the right rear door edge guard on the right rear door edge.

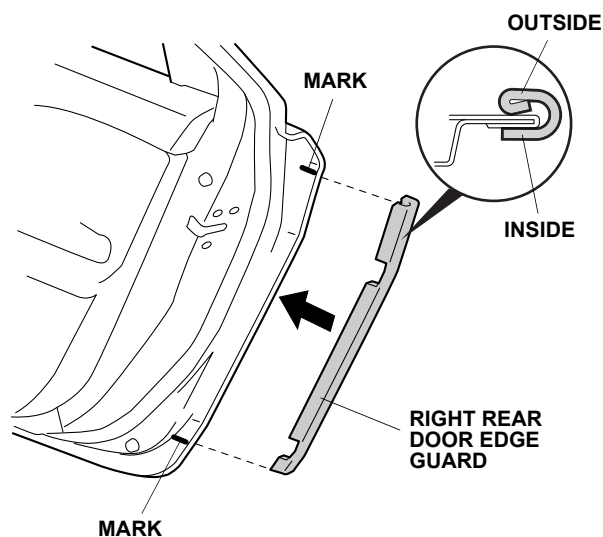

16. Using a rubber mallet, lightly tap around each bend in the right rear door edge guard.

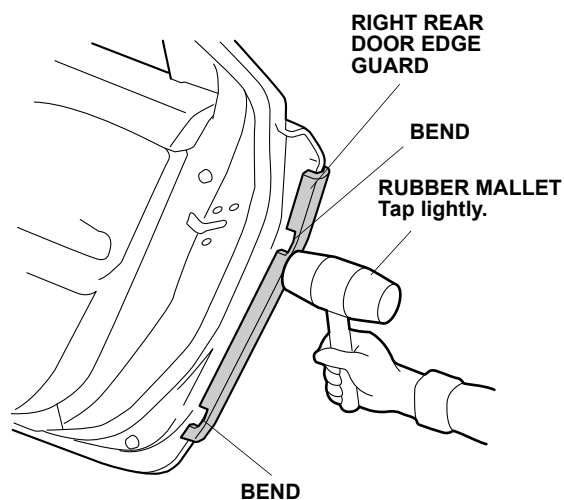

17. Lightly tap the rest of the right rear door edge guard into position.
18. Repeat steps 11 through 17 to install the left rear door edge guard.