



INSTALLATION INSTRUCTIONS


Accessory
SPLASH GUARDS

Application
2011 TL


Publications No.
BII 44602
Issue Date
AUG 2010

PARTS LIST

Left front splash guard



Right front splash guard



Left rear splash guard



Right rear splash guard



Left rear bracket



Right rear bracket




8 Self-tapping screws



2 Clips



2 Rear brackets



TOOLS AND SUPPLIES REQUIRED

- Stubby Phillips screwdriver
- 90° Phillips screwdriver


INSTALLATION

NOTE:

- Splash guards cannot be installed with side and rear under spoilers.
- These installation instructions show the left splash guards being installed. The same procedure applies to installing the right splash guards.
- Clean and wax the areas to be covered with a high-quality paste wax.


Installing the Front Splash Guards

- Turn the steering wheel fully counterclockwise.

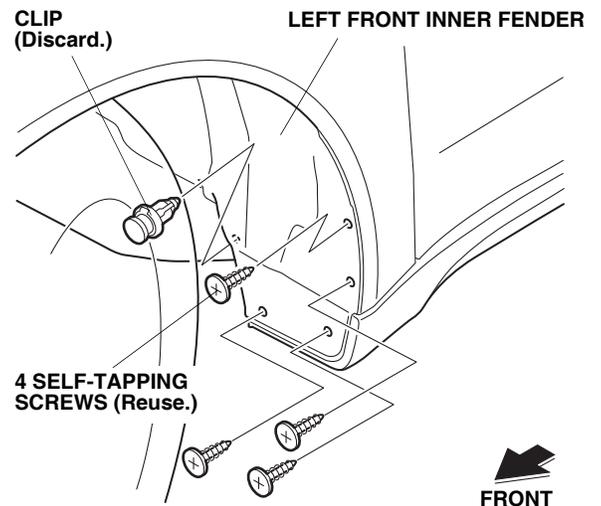

- Remove the four self-tapping screws and one clip from the left front inner fender.


3. Install the left front splash guard using four self-tapping screws. Do not tighten the self-tapping screws yet.

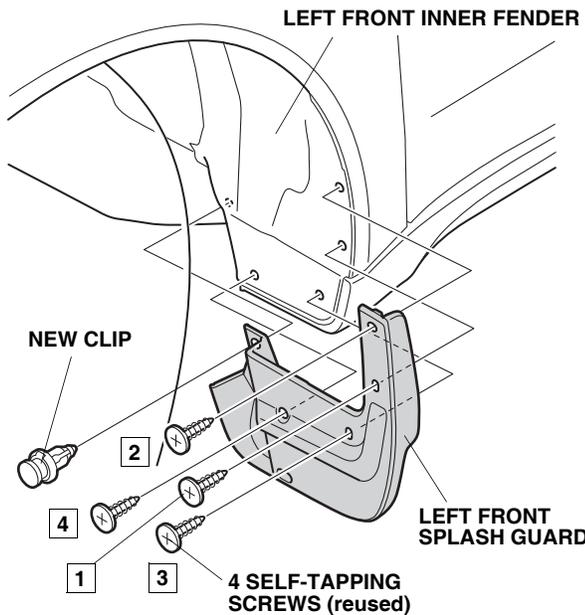


4. While holding the left front splash guard against the left front inner fender, tighten the self-tapping screws in the order shown. Install the new clip.
5. Turn the steering wheel all the way clockwise, and repeat steps 2 thru 4 to install the right front splash guard.

Installing the Rear Splash Guards


6. Remove the three self-tapping screws from the left rear inner fender.

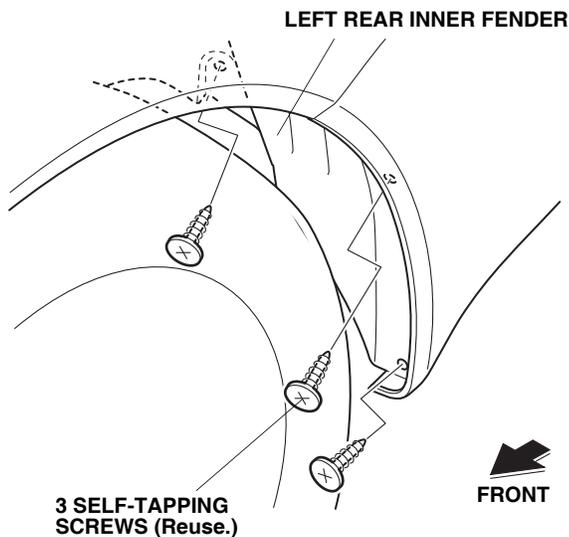

7. Install the left rear bracket on the left rear inner fender with two self-tapping screws.

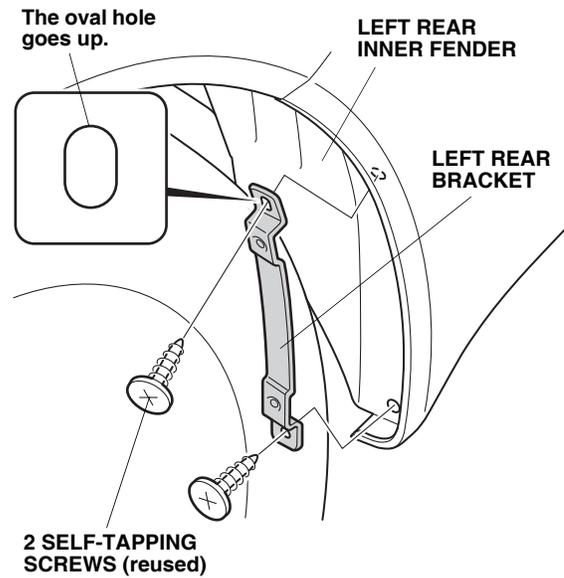


8. Secure the left rear splash guard on the left rear inner fender with two new self-tapping screws and one screw that is reused. Do not tighten the self-tapping screws yet.

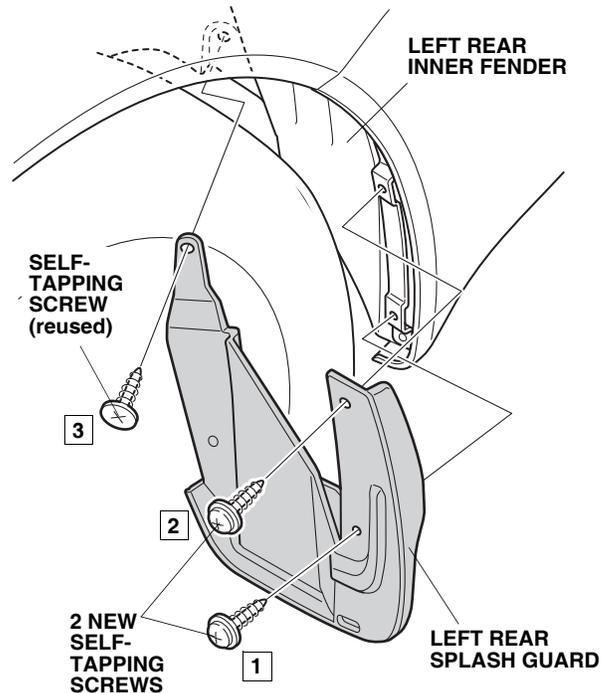

9. While holding the left rear splash guard against the left rear bumper, tighten the self-tapping screws in the order shown.

10. Install the rear bracket to the left rear splash guard and rear bumper with two new self-tapping screws.

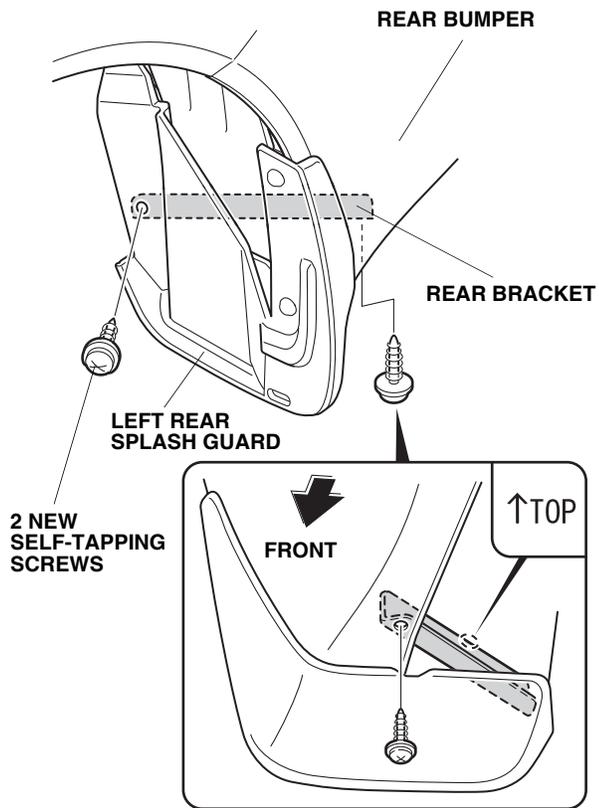

11. Repeat steps 6 thru 10 to install the right rear splash guard.