



INSTALLATION INSTRUCTIONS


Accessory
ALL-SEASON MATS

Application
2012 RL


Publications No.
BII 46932
Issue Date
OCT 2011

PARTS LIST


Driver's all-season mat




Passenger's all-season mat



Left rear all-season mat




Right rear all-season mat




INSTALLATION

NOTE:

- The anchors prevent the mats from sliding forward and possibly interfering with the pedals.
 - If you remove the front mat, make sure you reanchor it when you put it back in your vehicle.
 - If you replace the front mat, use a factory mat designed to be used with the anchors.
 - If you use a non-factory mat in the driver's footwell, make sure it fits properly and that it can be used with the anchors.
 - Do not put another mat on top of the anchored mat. An additional mat may slide forward and interfere with the pedals.
 - Identify each mat by the marks on the back: the mats marked "R" or "Passenger's side" go on the right side of the vehicle; the mats marked "L" or "Driver's side" go on the left side.
1. Turn the tabs of each anchor one quarter turn, and remove the driver's and passenger's vehicle floor mats.

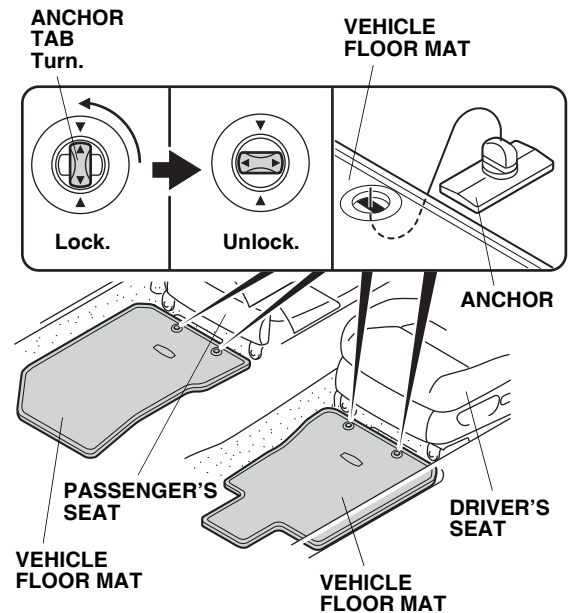

2. Position the driver's and passenger's all-season mats by aligning the slot with their anchors.

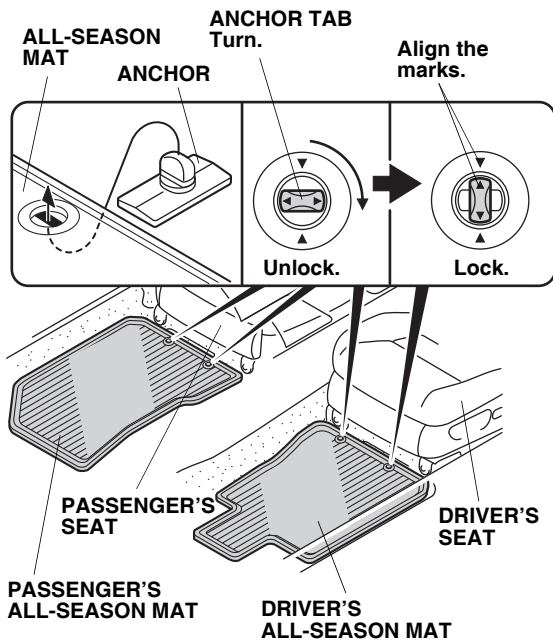

3. Turn the tabs on each anchor one quarter turn to secure the driver's and passenger's all-season mats.
4. Position the rear all-season mats as shown.

