



INSTALLATION INSTRUCTIONS

Accessory
REAR SPLASH GUARDS

Application
2012 ZDX


Publications No.
BII 46587
Issue Date
AUG 2011

PARTS LIST

Left rear splash guard




Right rear splash guard




Left bracket



Right bracket



4 Self-tapping screws, 5 x 20 mm




2 Clips



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
Stubby phillips screwdriver
Ratchet
10 mm Socket
Plastic Trim Tool
T/N SILTRIMTL10

Illustration of the Rear Splash Guards on the Vehicle

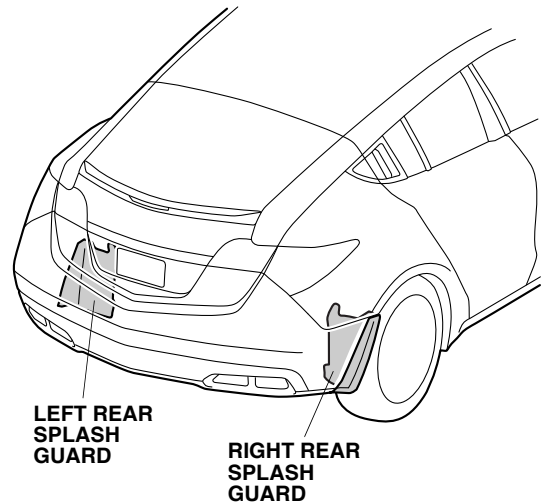


INSTALLATION

Client Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE: Do not damage the paint finish.


1. Remove three self-tapping screws and one bolt.

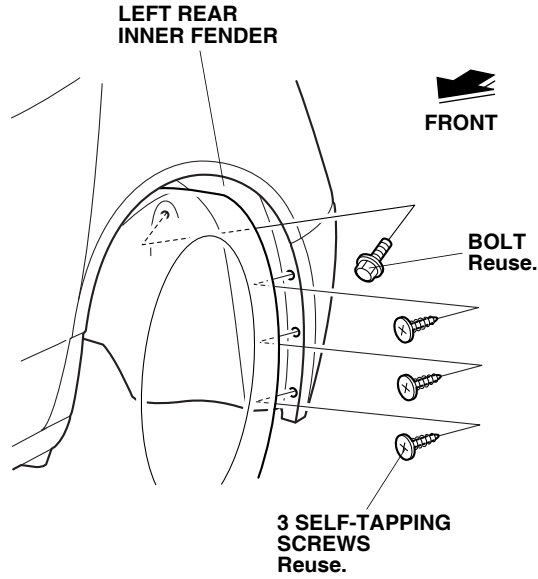


If the vehicle is equipped with BSI, go to step 2. If not, go to step 3.

With BSI


2. Remove one clip from the rear bumper.

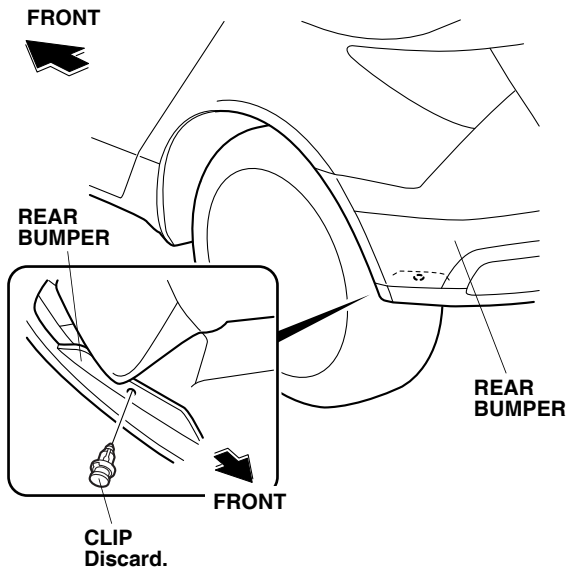


3. Install the left bracket to the left rear inner fender with three self-tapping screws removed in step 1.

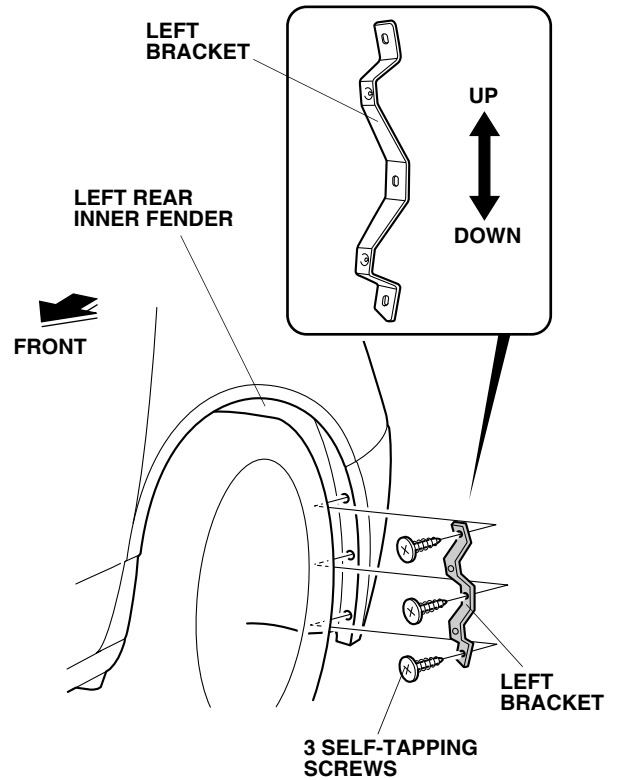

4. Install the left rear splash guard to the left rear inner fender and left bracket with two 5 x 20 mm self-tapping screws and the bolt removed in step 1.

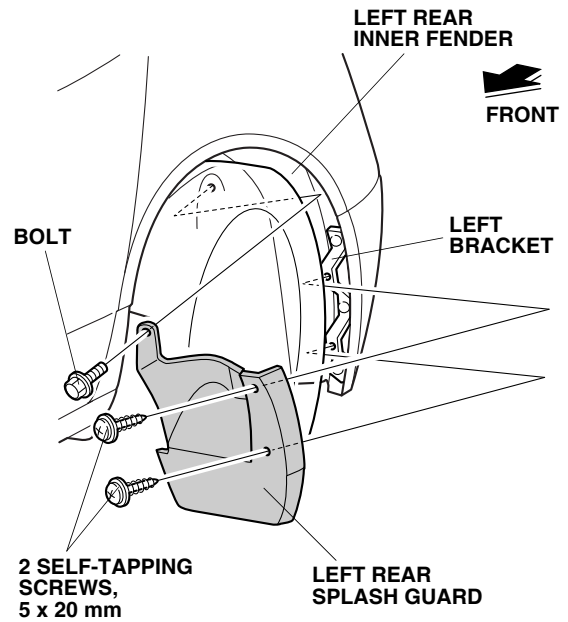

5. Secure the left rear splash guard to the rear bumper with one clip.

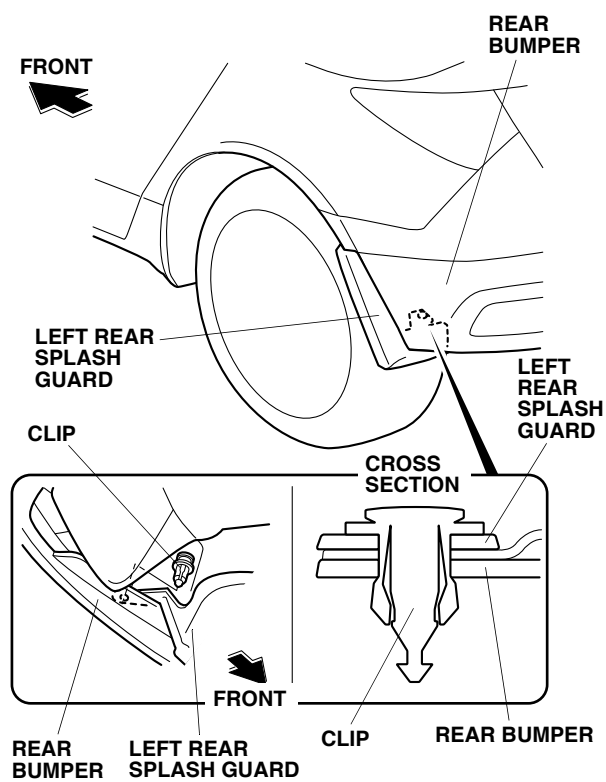

6. Repeat steps 1 through 5 to install the splash guard on the right side of the vehicle.