



# INSTALLATION INSTRUCTIONS


Accessory  
**FRONT SPLASH GUARDS**  
P/N 06750-TZ6-C000

Application  
**2018 TLX**


Publications No.  
**VERSION 1**  
Issue Date  
**JUNE 2017**

## PARTS LIST

Left front splash guard



Right front splash guard



4 Self-tapping screws, 5 x 20 mm



## TOOL AND SUPPLIES REQUIRED

Phillips screwdriver

Pushpin

The following tool is available through the Acura Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.  
Trim Tool Set (T/N SOJATP2014)


## INSTALLATION

**Client Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE: Do not damage the paint finish.


### Installing the Front Splash Guards

1. Turn the steering wheel fully counterclockwise.

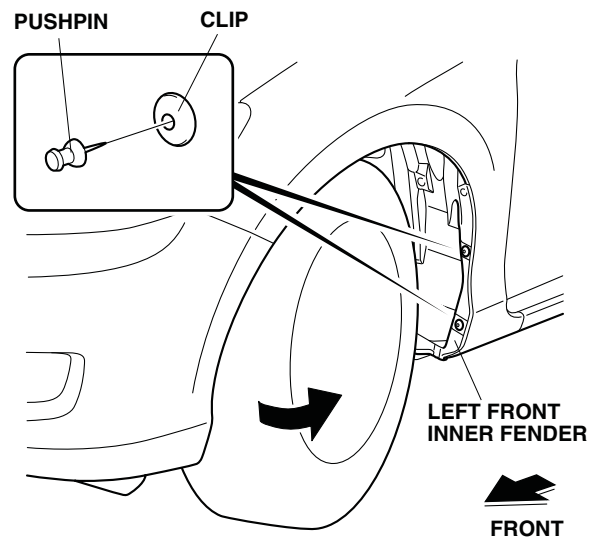


2. Using a pushpin, pierce the center of the two clips in the left front inner fender.

3. Remove the clip from the left front inner fender.

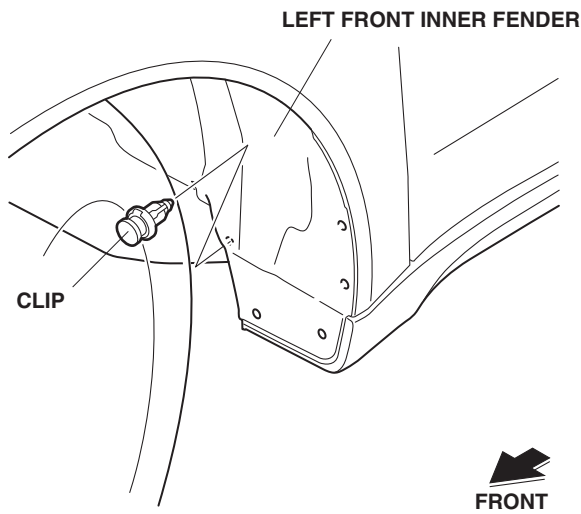

4. Install the left front splash guard to the left front inner fender with two self-tapping screws and the clip removed in step 3.

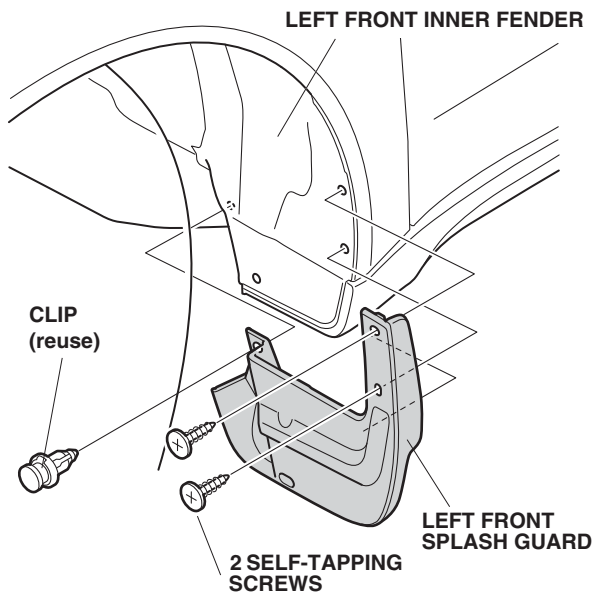

5. Repeat steps 1 through 4 to install the right rear splash guard.