



INSTALLATION INSTRUCTIONS

Accessory
**ILLUMINATED
DOOR SILL TRIMS**

Application
2019 RDX

Publications No.
VERSION 1
Issue Date
MAY 2018

PARTS LIST

Illuminated Door Sill Trims Kit
P/N 08E12-TJB-200
P/N 08E12-TJB-200A

Left illuminated door sill trim



Right illuminated door sill trim



2 Door sill trim harnesses



6 Wire ties



2 Fuse labels



TOOLS AND SUPPLIES REQUIRED

Isopropyl alcohol

Shop towel

Diagonal cutters


10 mm Open end wrench

Phillips screwdriver

The following tools are available through the Acura Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)


Illustration of the Illuminated Door Sill Trims on the Vehicle

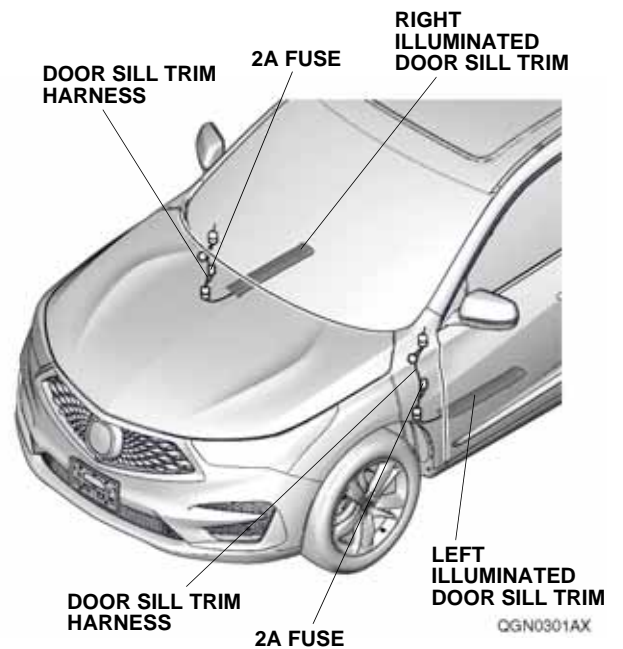


INSTALLATION

Client Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”


1. Disconnect the negative cable from the battery.
2. Remove the passenger's dashboard under cover, and unplug the vehicle connector.

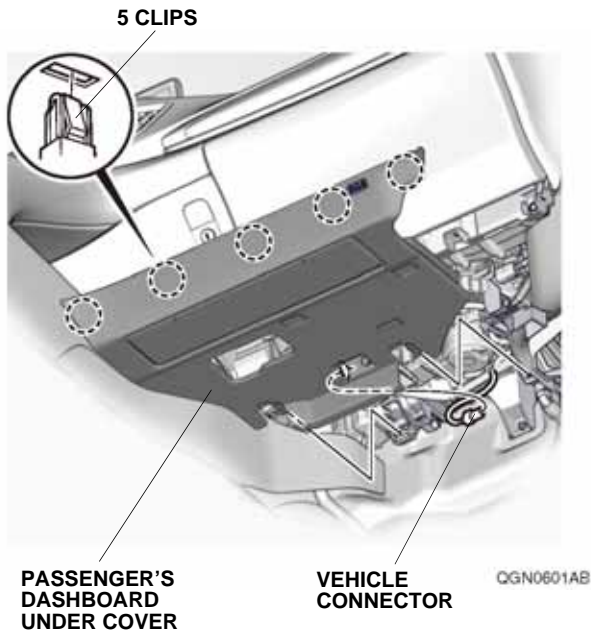


3. Remove the passenger's door sill trim.

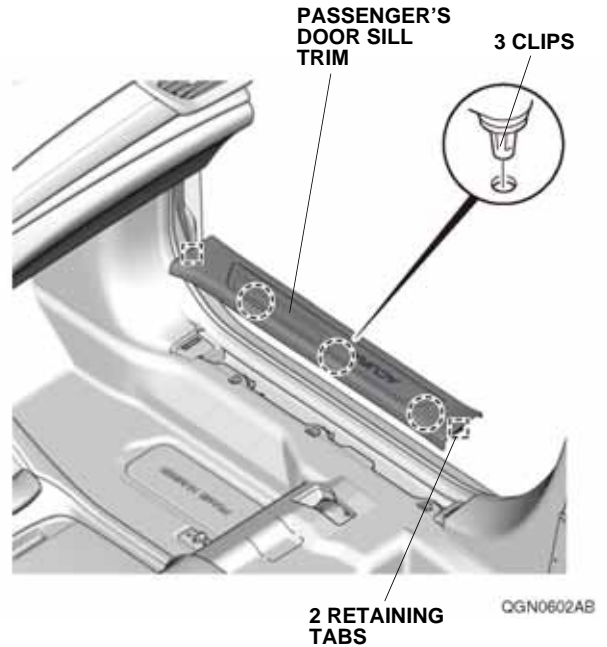


4. Pull away the door opening seal, and remove the passenger's kick panel.

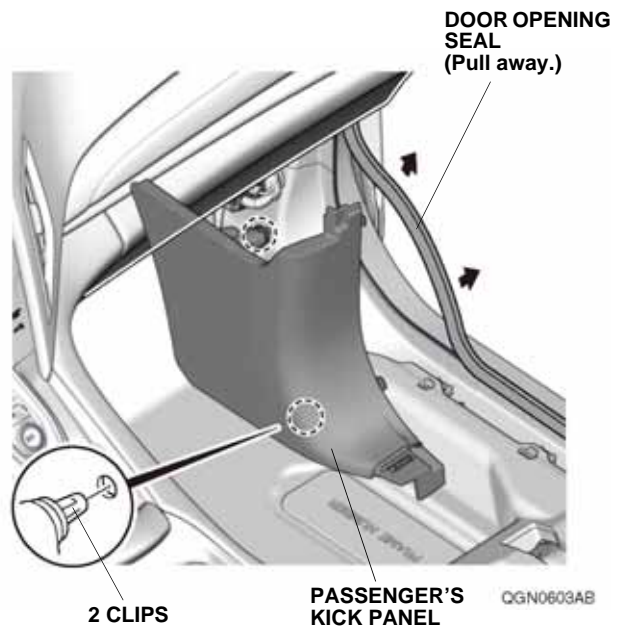


5. Pull away the door opening seal, and remove the driver's dashboard side lid.

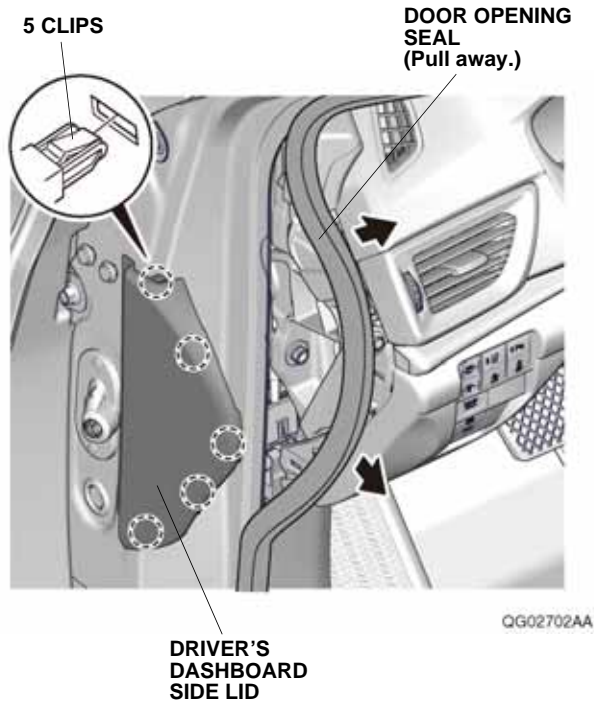


6. Remove the driver's dashboard side vent.

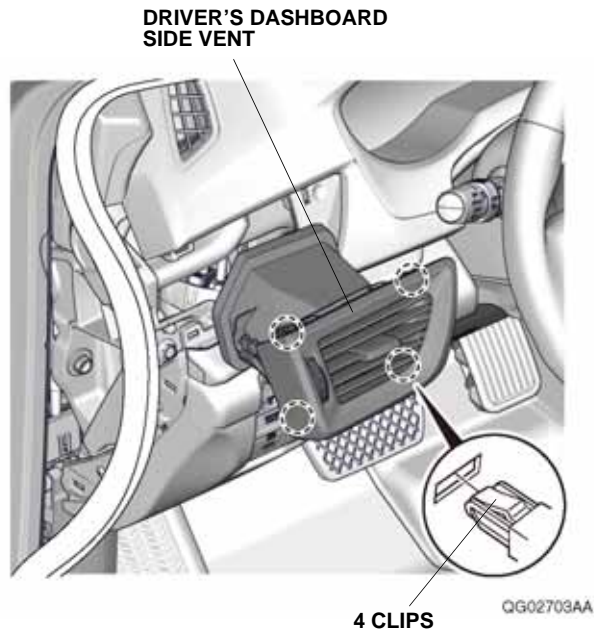


7. Remove the left trim, and unplug the vehicle connector.

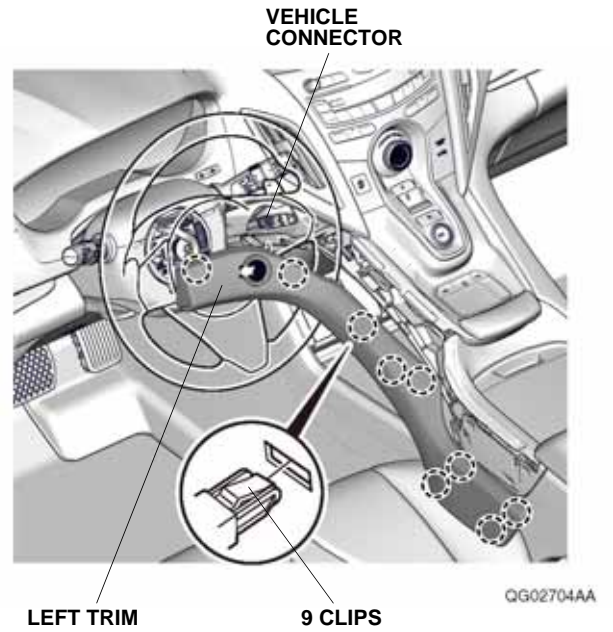


8. Remove the driver's dashboard lower cover, and unplug the vehicle connectors and vehicle sensor.

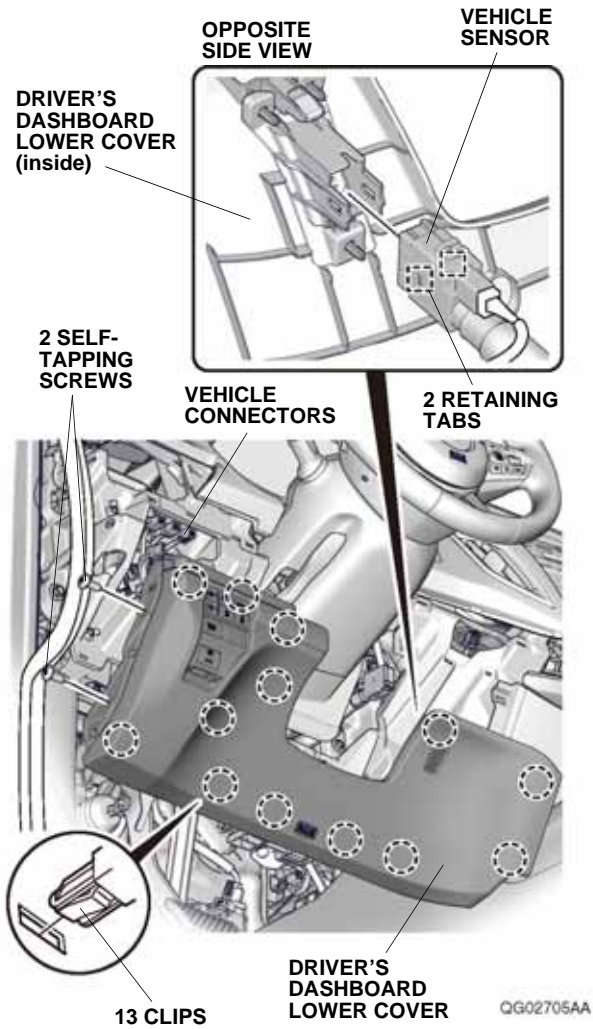


9. Remove the driver's door sill trim.

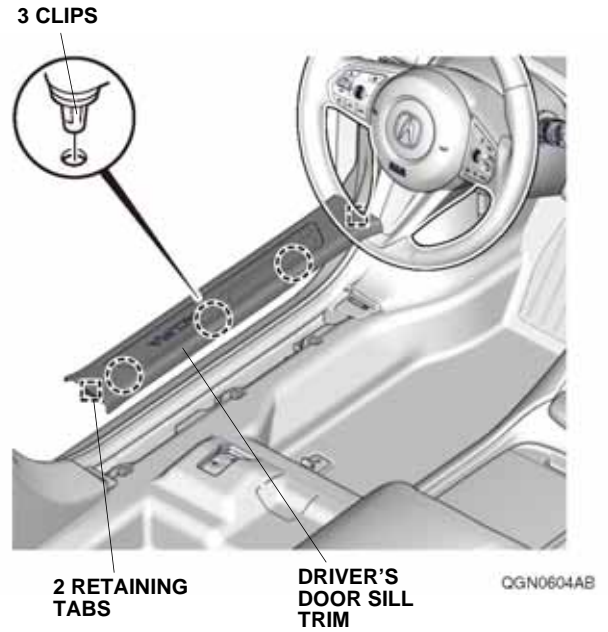


10. Pull away the door opening seal, and remove the driver's kick panel.

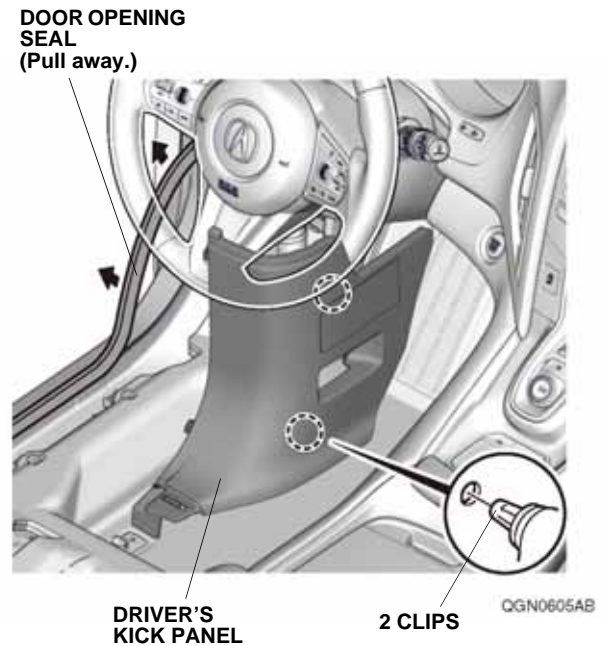


- Remove the three clips from the driver's door sill trim, then install the clips on the left illuminated door sill trim.
NOTE: Check the shape of the left illuminated door sill trim.

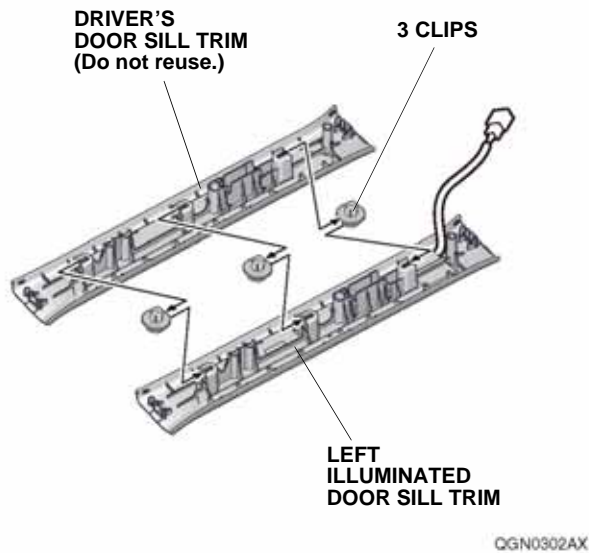


- Using isopropyl alcohol on a shop towel, thoroughly clean the fuse case where the fuse label will attach. Attach the fuse label (2A STEP ILLUMI) to the fuse case on the door sill trim harness.

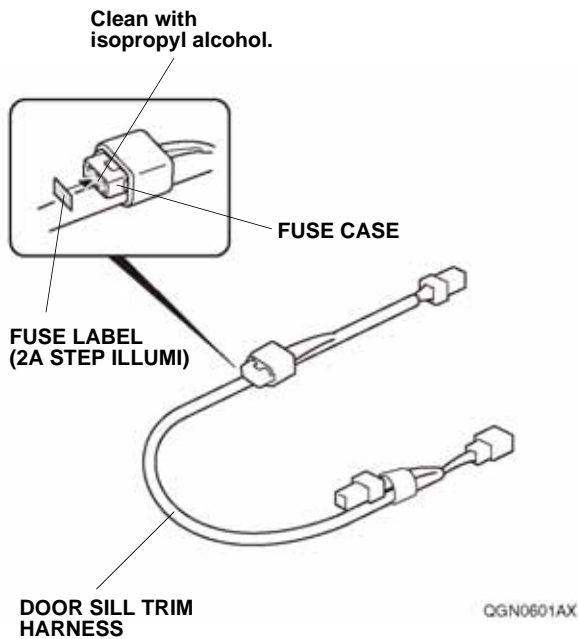

- Plug the door sill trim harness 2-pin connector into the left illuminated door sill trim 2-pin connector.

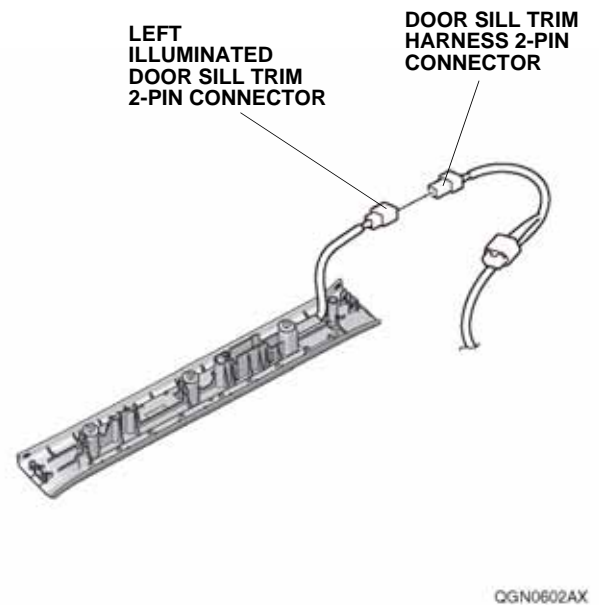


- Repeat steps 11 through 13 on the right illuminated door sill trim.
- Position the left illuminated door sill trim on the vehicle panel, and route the door sill trim harness along the vehicle harness.

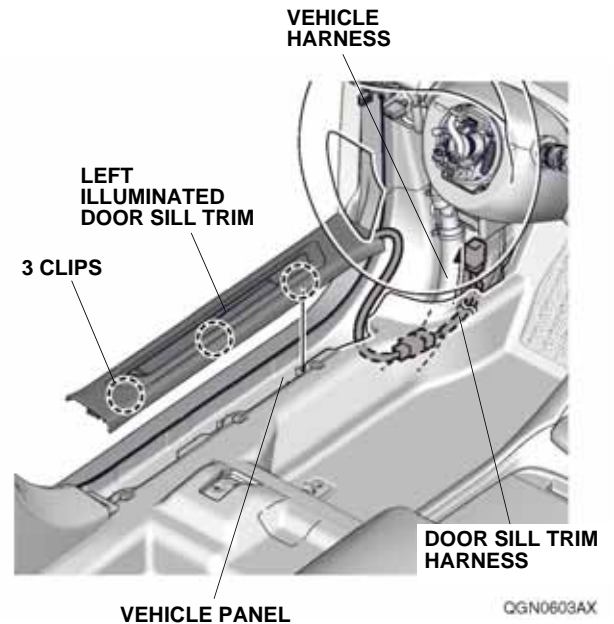


- Route the door sill trim harness, and plug the vehicle 2-pin connector into the door sill trim harness 2-pin connector.

NOTE: If the vehicle is already equipped with another accessory harness, unplug the other accessory harness 2-pin connector and plug it into the door sill trim harness 2-pin connector. Then, plug the door sill trim harness 2-pin connector into the vehicle 2-pin connector.

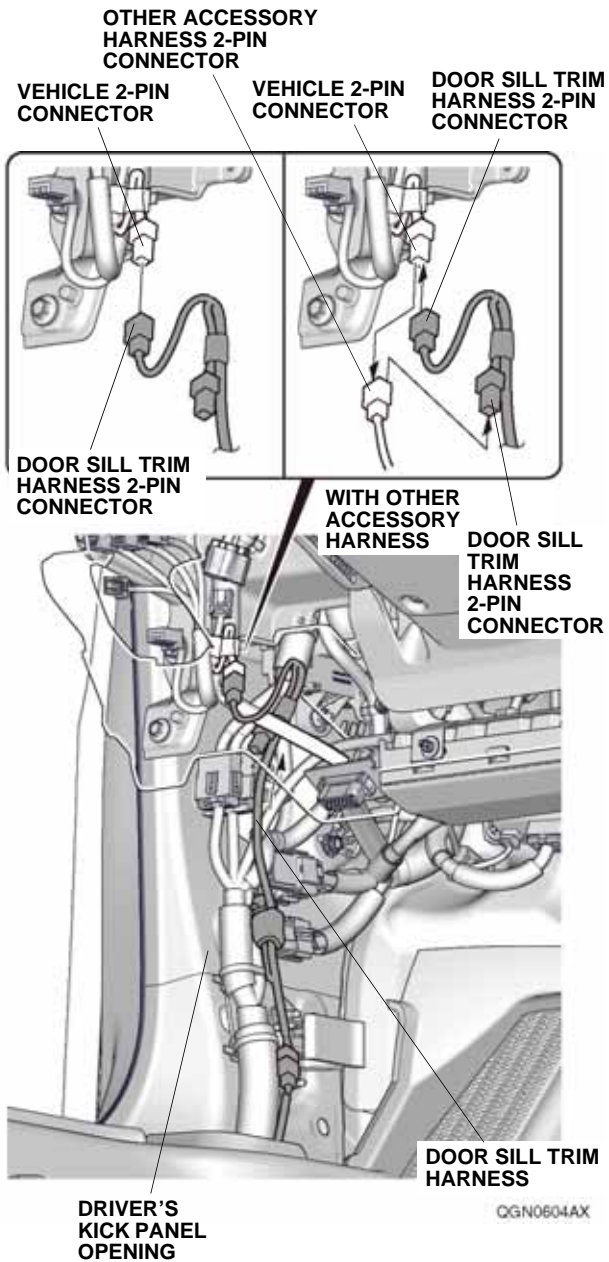


- Secure the door sill trim harness, fuse case, and 2-pin connectors with three wire ties as shown.

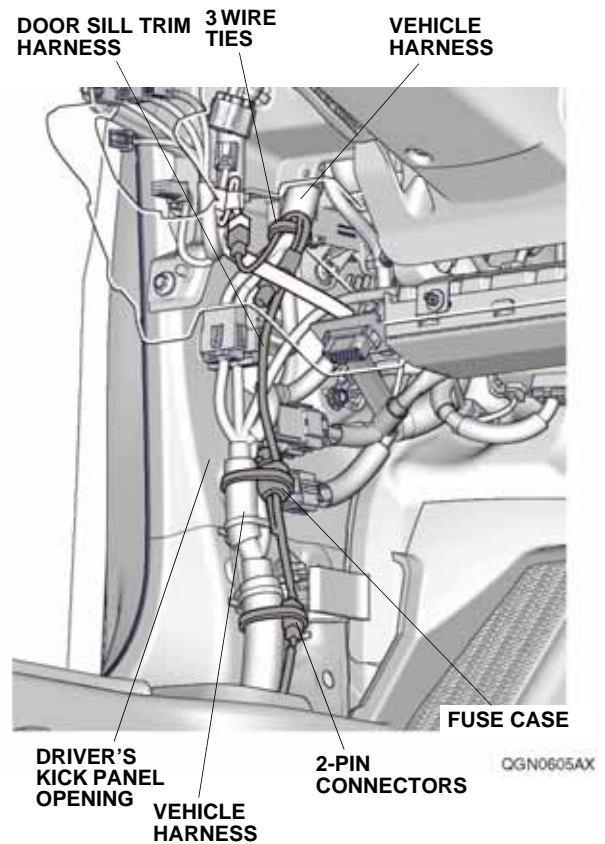


- Install the driver's kick panel and door opening seal. Then, install the left illuminated door sill trim on the vehicle panel.

NOTE: Do not pinch the left illuminated door sill trim harness.

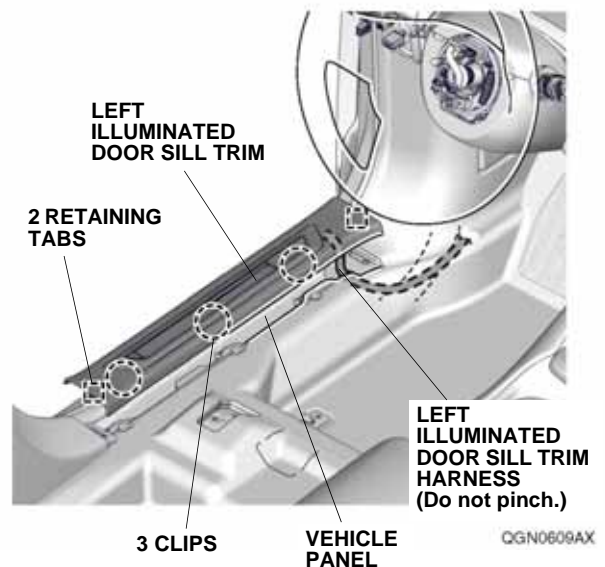


19. Position the right illuminated door sill trim on the vehicle panel, and route the door sill trim harness along the vehicle harness.

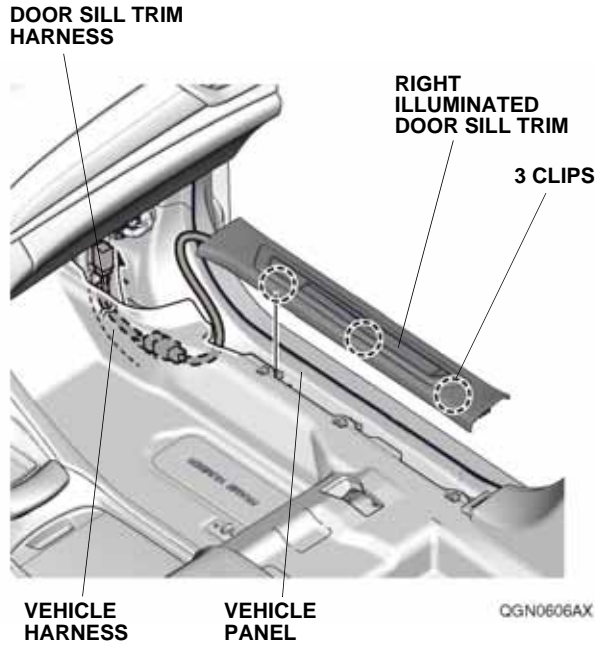


20. Route the door sill trim harness, and plug the vehicle 2-pin connector into the door sill trim harness 2-pin connector.


NOTE: If the vehicle is already equipped with another accessory harness, unplug the other accessory harness 2-pin connector and plug it into the door sill trim harness 2-pin connector. Then, plug the door sill trim harness 2-pin connector into the vehicle 2-pin connector.

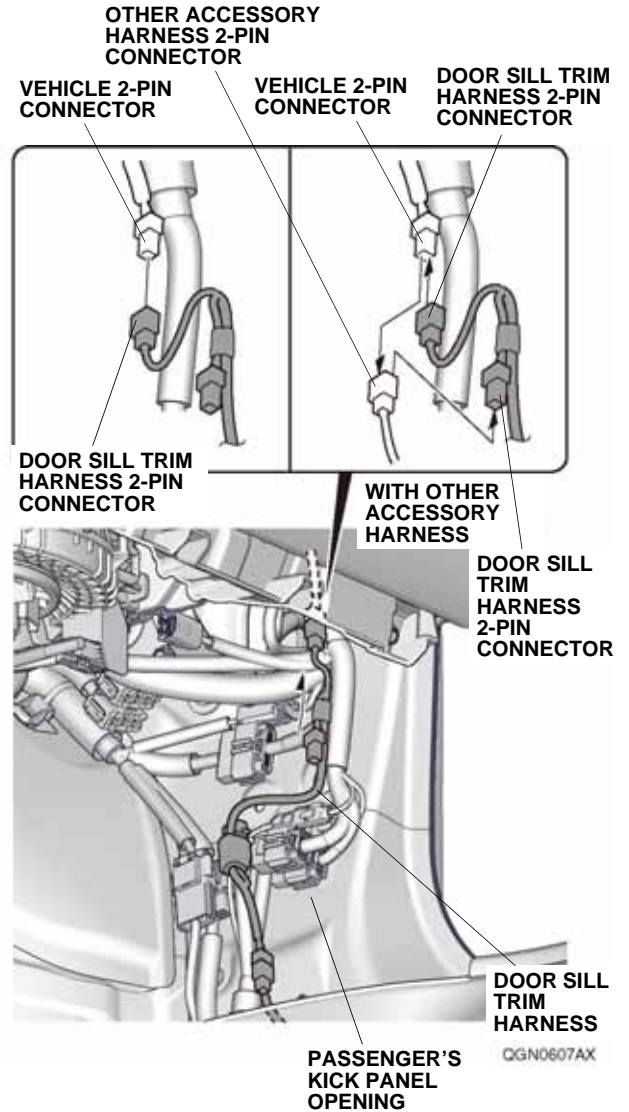

21. Secure the door sill trim harness and 2-pin connectors with three wire ties as shown.

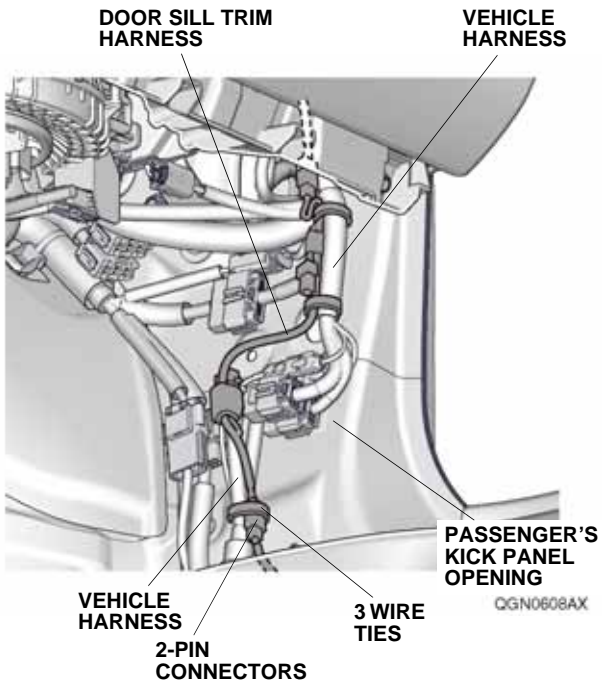

22. Install the passenger's kick panel and door opening seal. Then, install the right illuminated door sill trim on the vehicle panel.
NOTE: Do not pinch the right illuminated door sill trim harness.

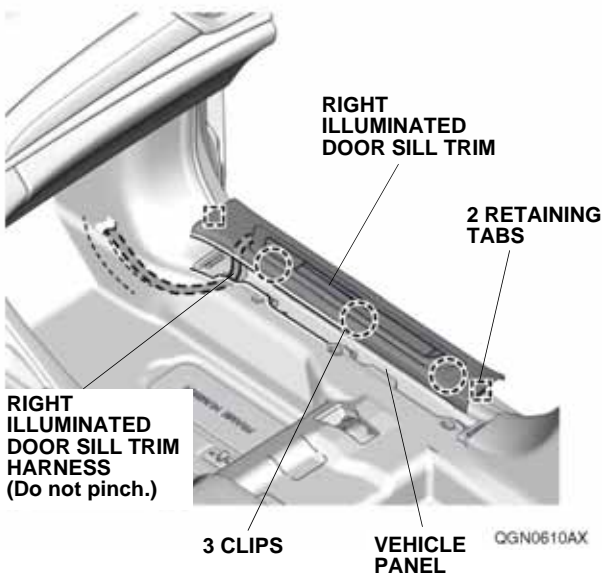

23. Check that all wire harnesses are routed properly and all connectors are plugged in.
24. Install all removed parts.
25. Connect the negative cable to the battery.
26. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
27. Set the clock on vehicles without navigation.
28. If necessary, restore the systems back to normal operation as described in the service information.

Check the Operation of the Illuminated Door Sill Trims

29. Make sure the light comes on when you open each door.